GK-03

PRODUCT MANUAL



- Motor power: 400 W
- Battery capacity: 18 V / 6 Ah
- Charging time: 2-3h
- Building time: 6-20 hours
- Max load: 50kg
- Net weight: 30kg
- Run time: 1 hour

Beyond Play

The Innovator Kit

CONTENTS

1 ..... Contents

2-4 ..... Warning

5-39 ..... Assembly steps

40-41 ..... Diagram

Please read this instruction manual and all warnings before assembly.
For more information, visit our website: www.beyondplay.me

WARNING!

Please assemble and use under adult supervision.



WARNING:

This product should be assembled and used under adult supervision. Parents should review all of the following warnings and instructions in advance, and make sure that all riders understand all warnings, cautions, instructions and safety topics, and that young riders are able to use this product safely and responsibly. We recommend that you review and reinforce the information in this manual periodically with younger riders, and that you inspect and maintain your ride to ensure its safety.

The rides and all the parts have been tested by official independent testing agencies. We shall not be responsible or liable, directly or indirectly, in any way for any personal injury or product damage caused by non-compliance with the terms and conditions in our manuals.

Usage guidelines


1. Check frequently to make sure all parts are still firmly tightened and functioning properly.
2. Never exceed the maximum load or the maximum tightening torque (25 N·m). You can find the maximum load for each ride in our manual.
3. Avoid streets, and avoid excessive exposure to sunlight, water, sand, gravel and other debris that will shorten the life of your ride.
4. Avoid sharp bumps, drainage grates and sudden surface changes. Ride on smooth, paved surfaces.
5. Small parts present a choking hazard to children under the age of three. Take care during unpacking and assembly to ensure that all small parts and plastic bags are accounted for and kept out of the reach of children.
6. Dirt, leaves and other debris can damage, shrink, expand or weaken the parts. Keep your ride in a dry environment.
7. Most components are specially designed. Please do not mix them with similar parts on the market.
8. Check the air pressure in the tires: maximum 1.8 bar.
9. Dress appropriately. Do not wear loose clothing or jewelry. Keep your hair, clothing and gloves away from moving parts so that they do not get caught.
10. Use personal protective equipment. Always wear protective equipment such as non-skid safety shoes and a safety helmet.
11. Disconnect the battery pack from the ride before making any adjustments, changing accessories or storing it.

Electrical safety warning


Read all safety warnings and all instructions. Failure to follow the warnings and instructions may result in electric shock, fire or serious injury.

1. Use the charger indoors only. Keep the work area clean and well lit. Do not expose the product to rain or wet conditions.
2. Recharge only with the charger and battery pack specifically designated by the manufacturer.
3. When the battery is not in use, keep it away from other metal objects. Shorting the battery terminals together may cause burns or a fire.
4. Do not open the battery or the charger: danger of short-circuiting. Protect the battery against heat (for example, continuous intense sunlight), fire, water and moisture: danger of explosion.

RECOMMENDED TOOLS

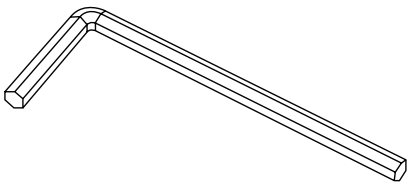


Hex key



Hex handle




Pliers




Tape measure


GK-03

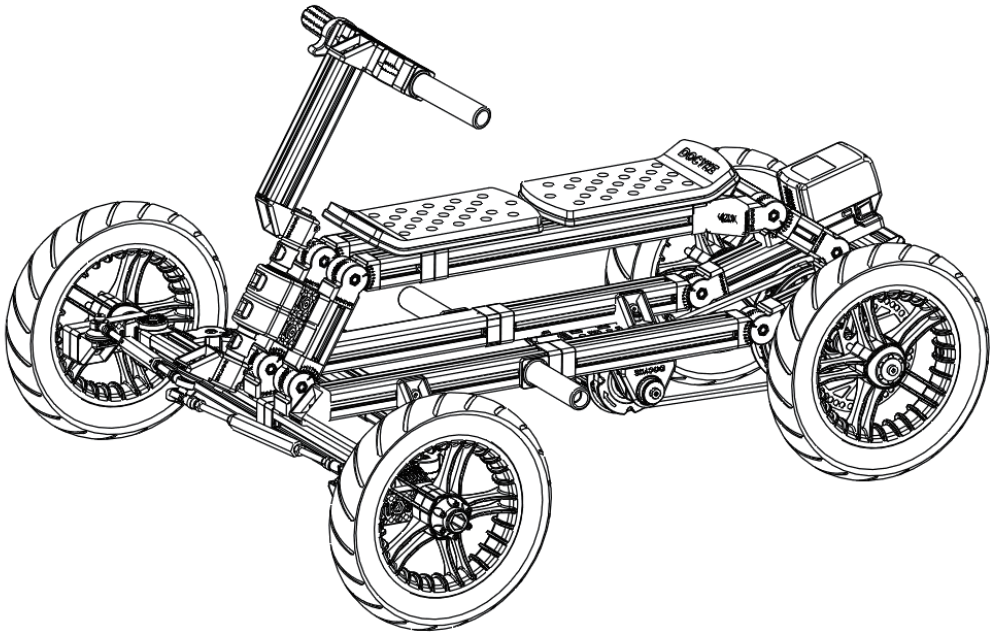


1 PART

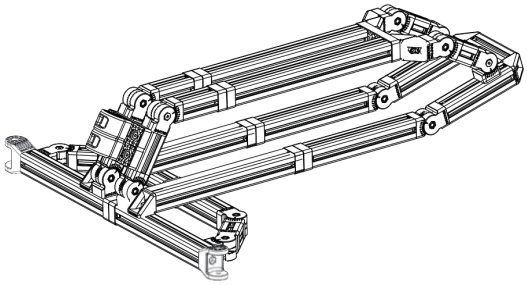


2 PART

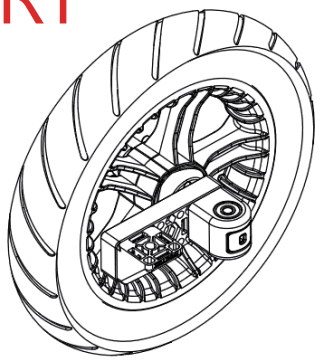


3 PART

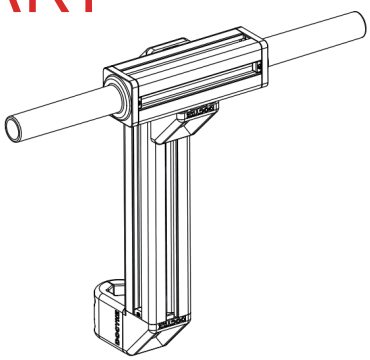


4 PART

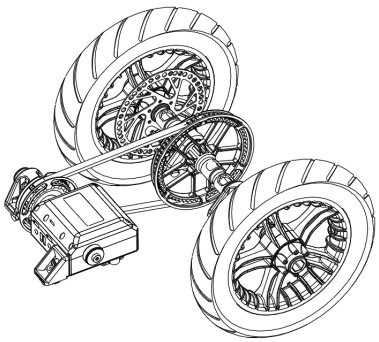


1 PART

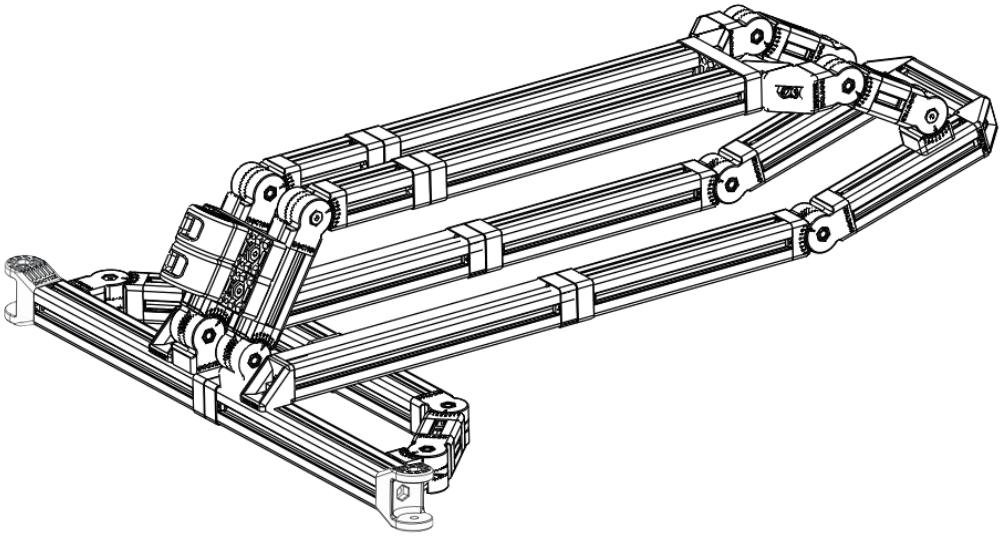


PART 1-1

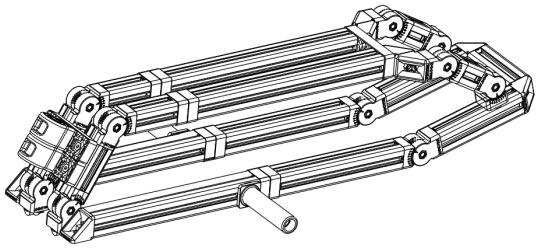


PART 1-2

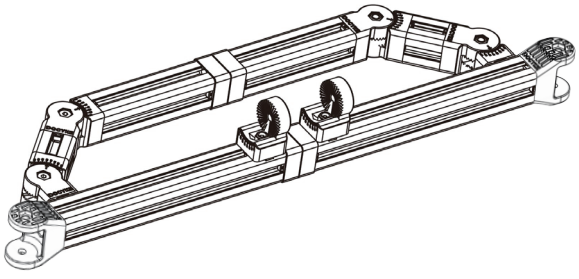


PART 1-1

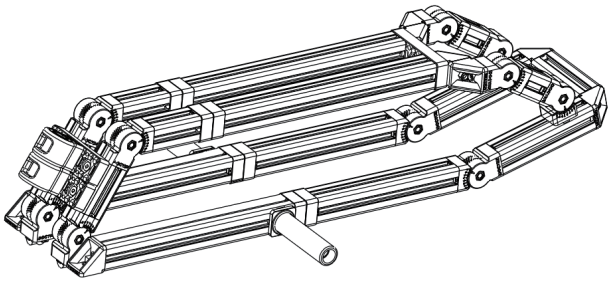





The positioning blocks are some of the smallest parts, but they are also some of the most important. Putting them in the right place is key to the product.

A-1

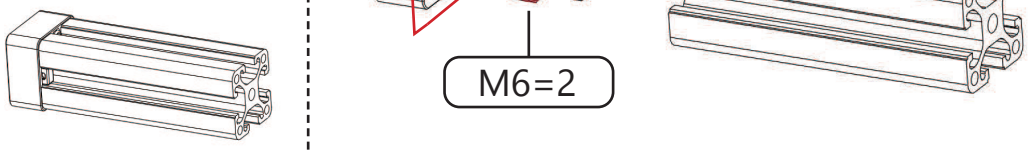


A-2

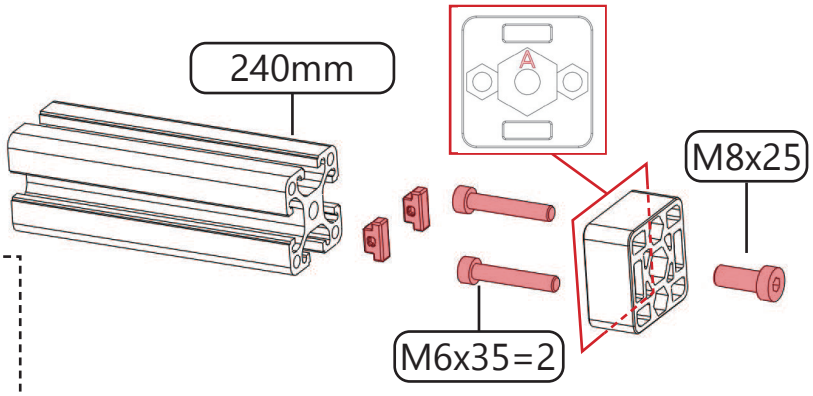





A-3

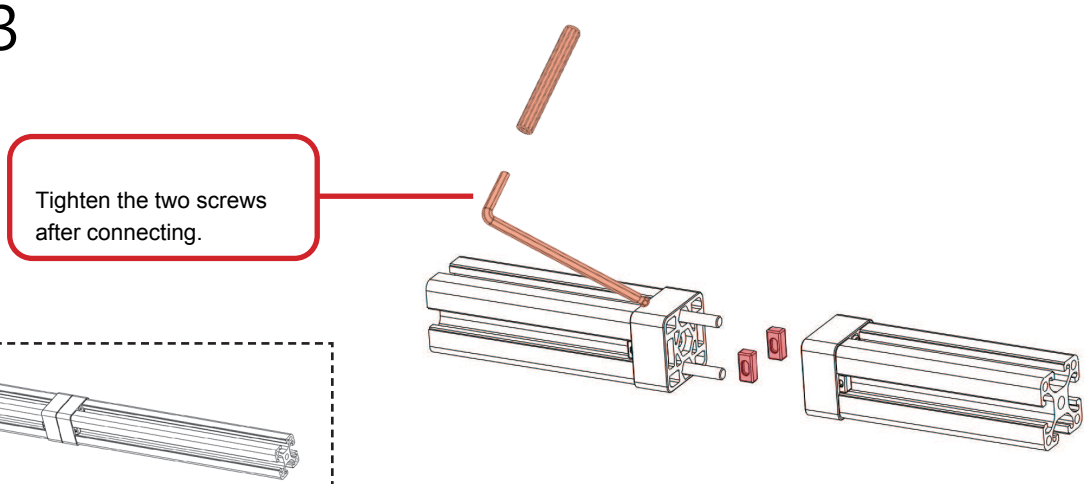


A-4

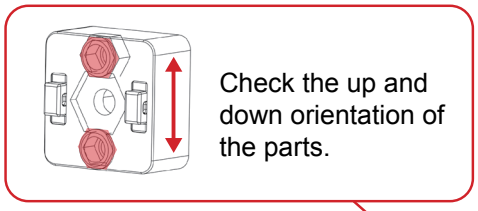


Check the up and down orientation of the parts.

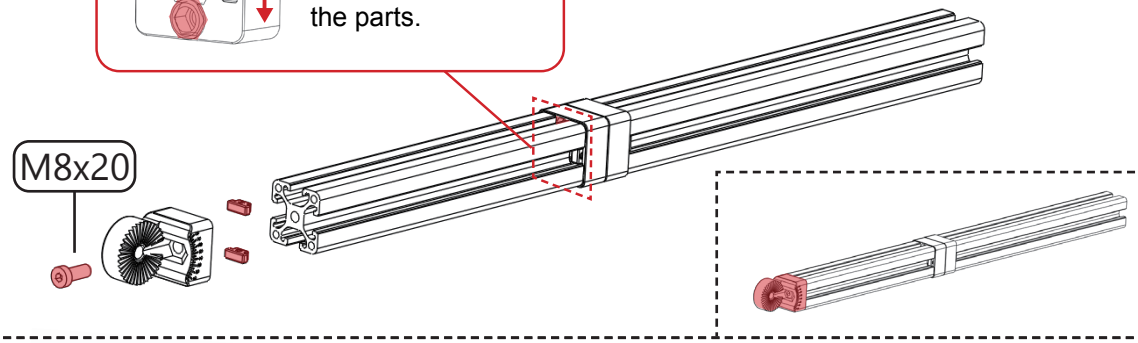


A-5

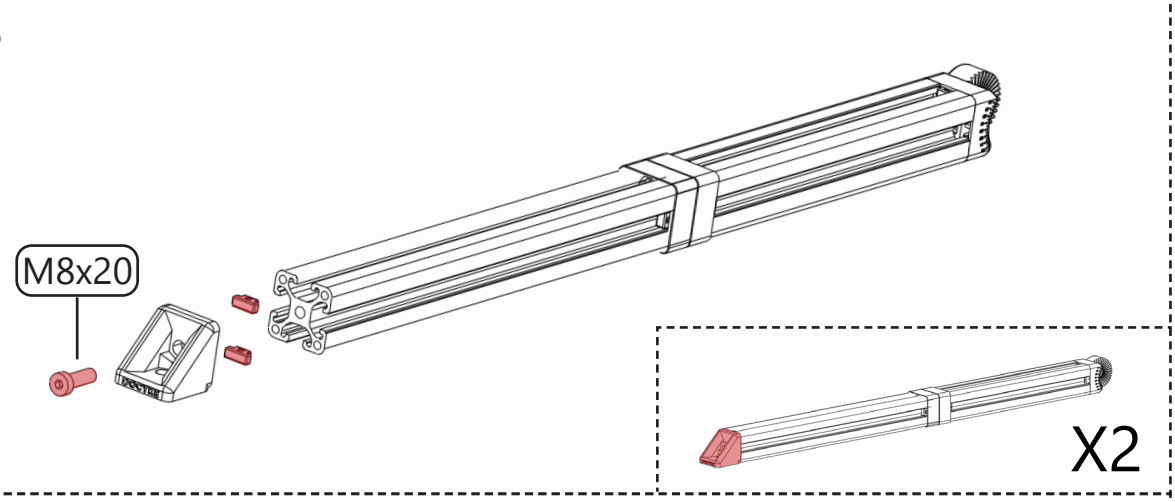


B-1

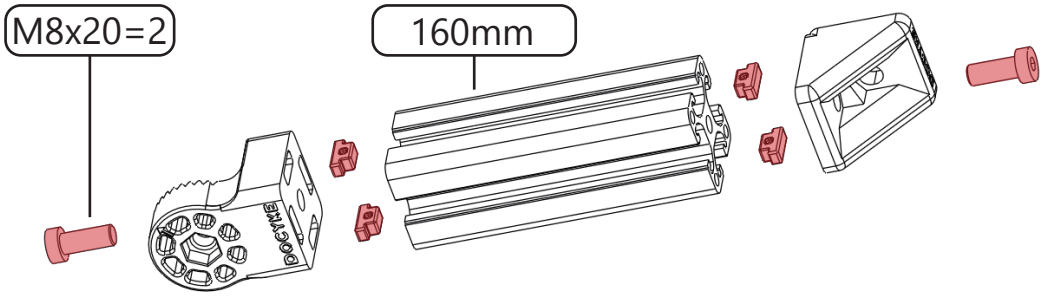


As shown in the figure, assemble 2 components.

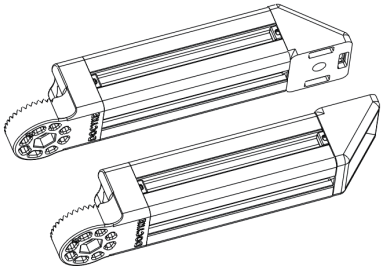


B-2

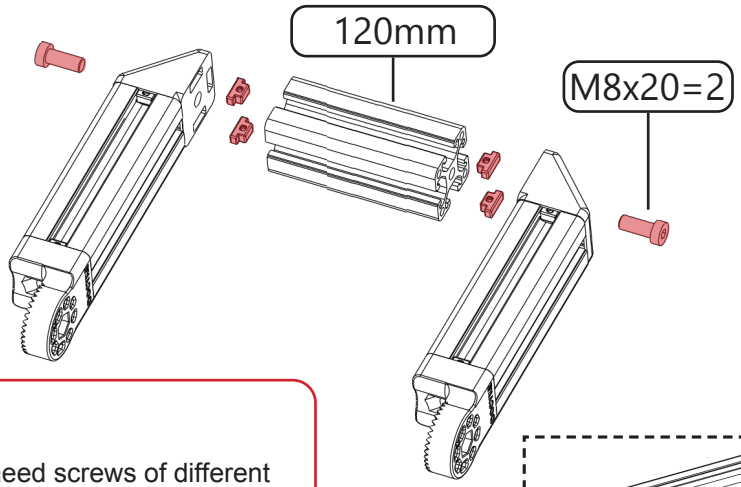



Different locations need screws of different lengths, so follow the instruction manual and use the hex wrench handle to tighten the screws and prevent them from coming loose.

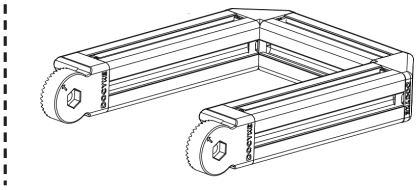


B-3

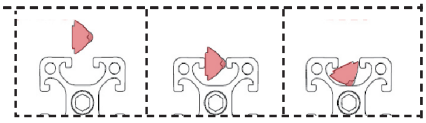


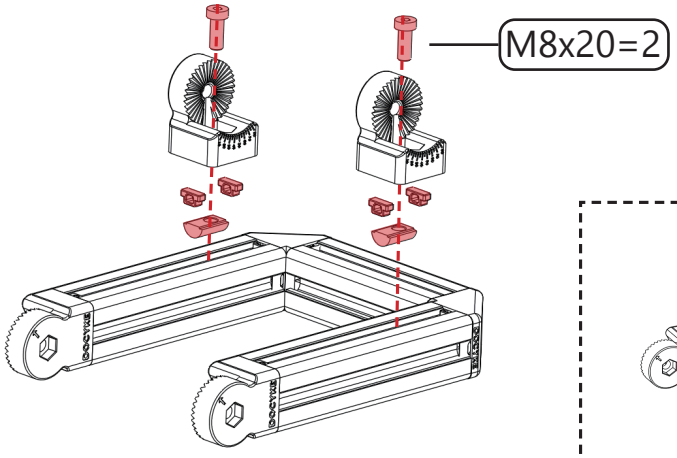




B-4

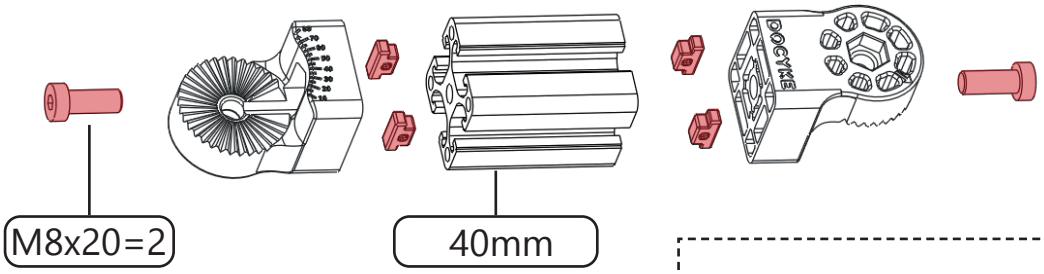





X2


B-5

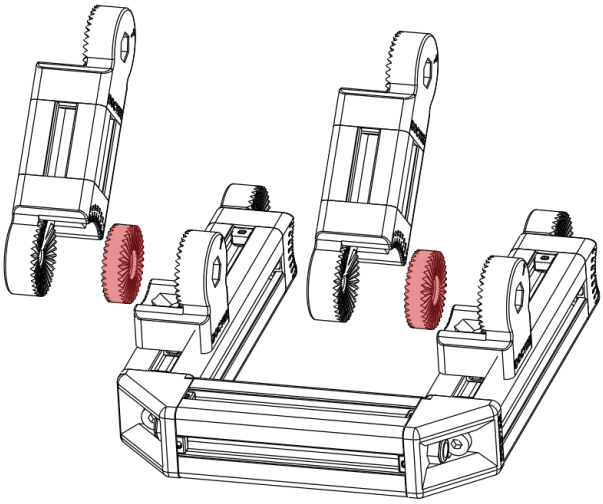

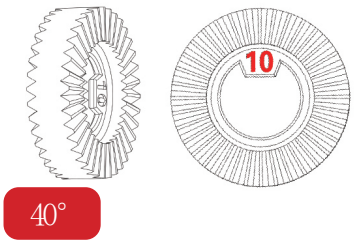



B-6

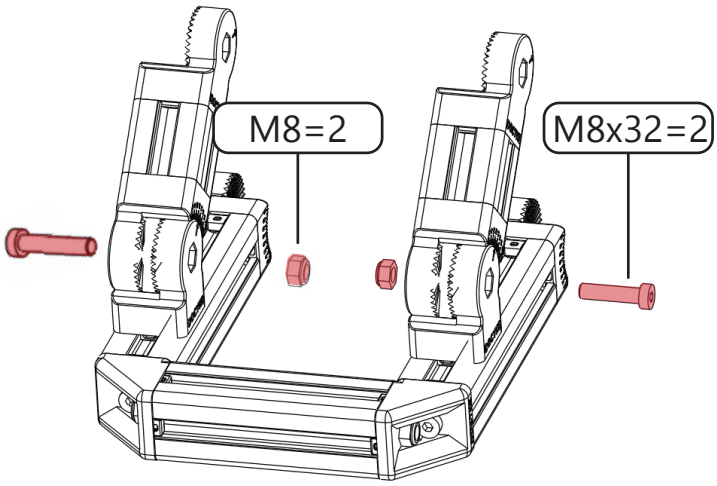




B-7

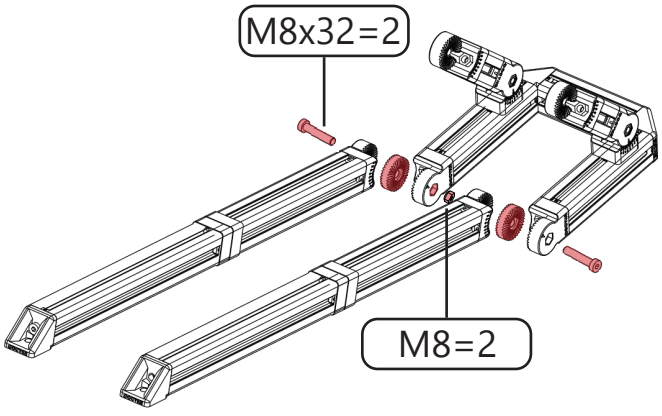


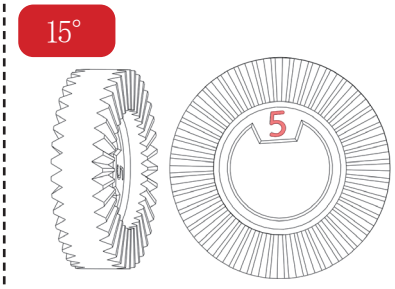


C-1

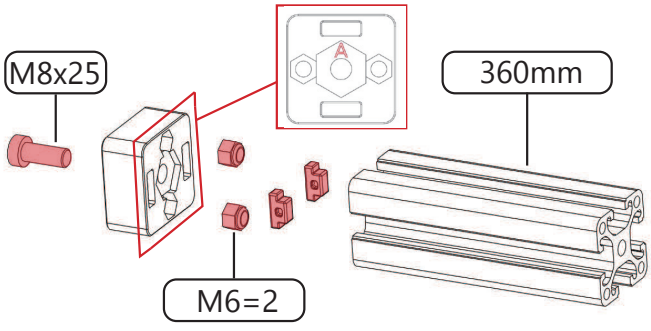


C-2

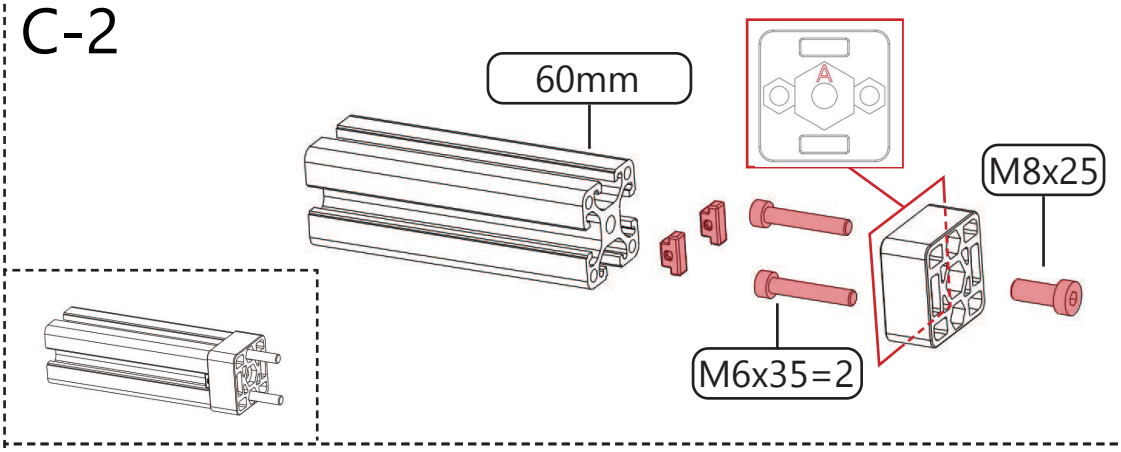
60mm
A
M8x25
M6x35=2


C-3

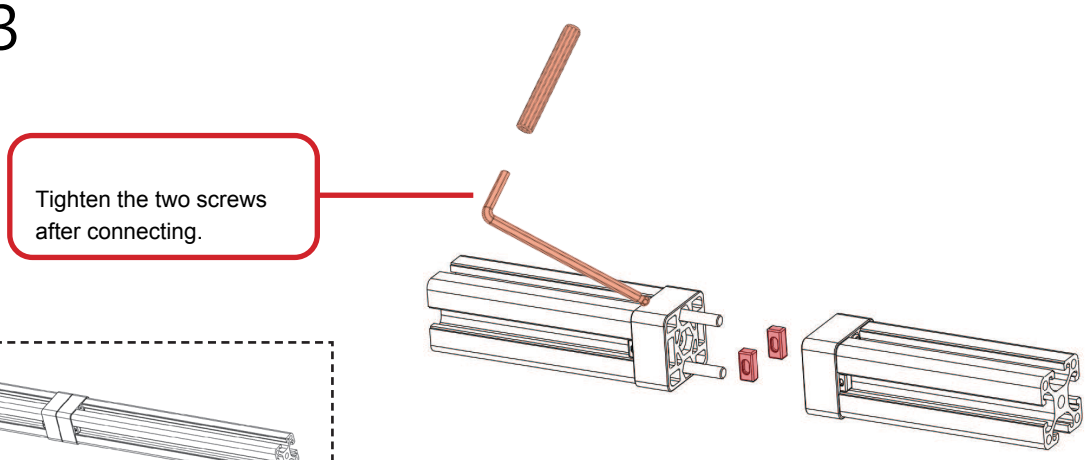
Tighten the two screws
after connecting.

C-4

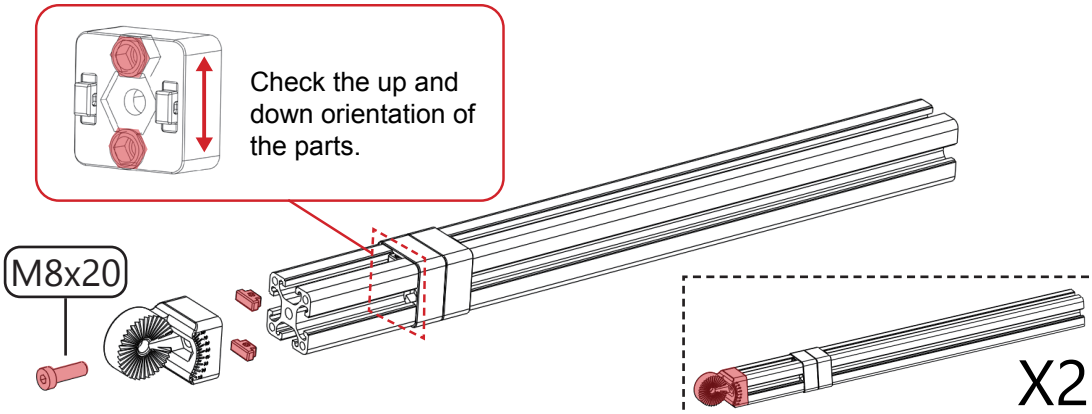

Check the up and
down orientation of
the parts.
M8x20
X2


C-5

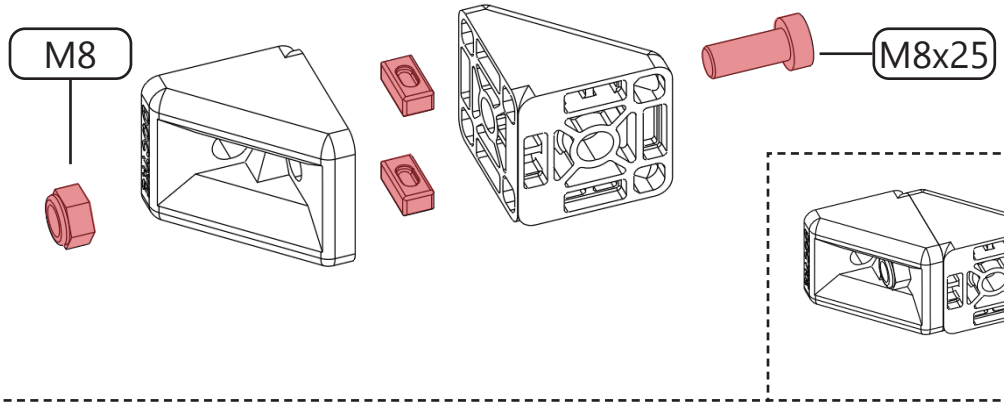
M8
M8x25
X2


C-6


Tighten the bolts fully to prevent them from coming loose.

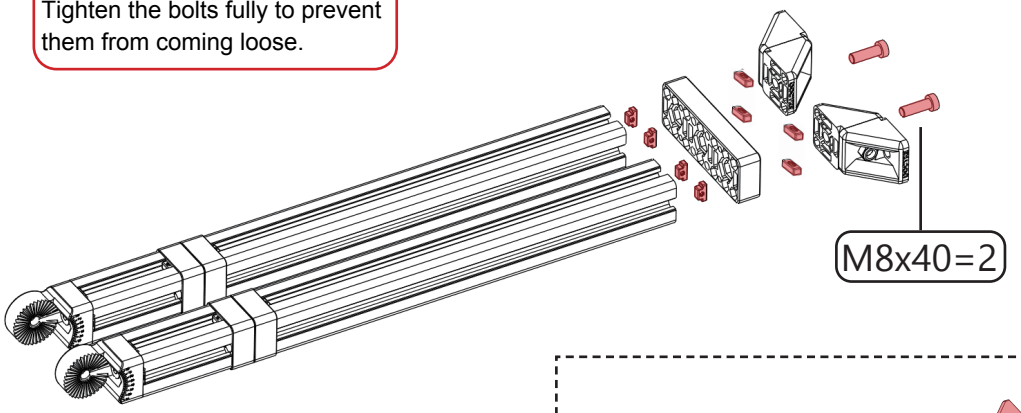

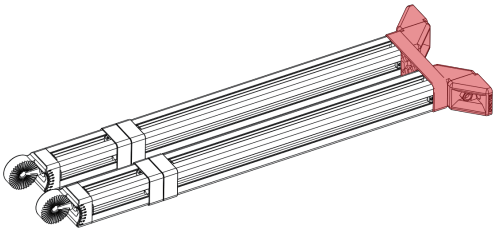



D-1

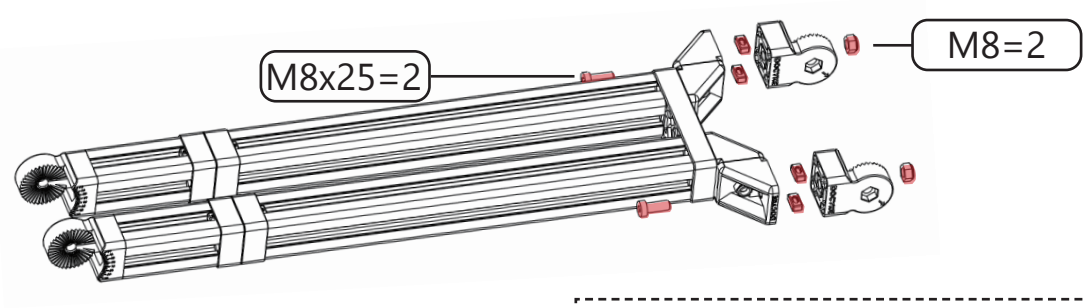

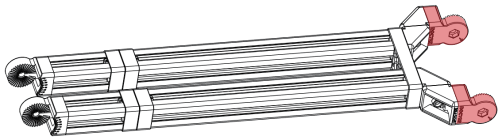



D-2

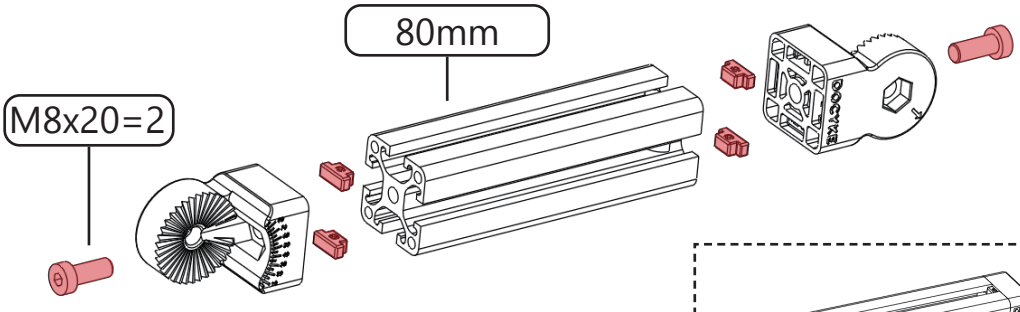

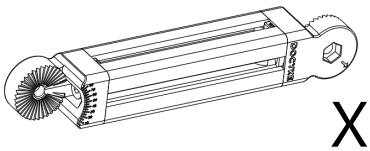



D-3

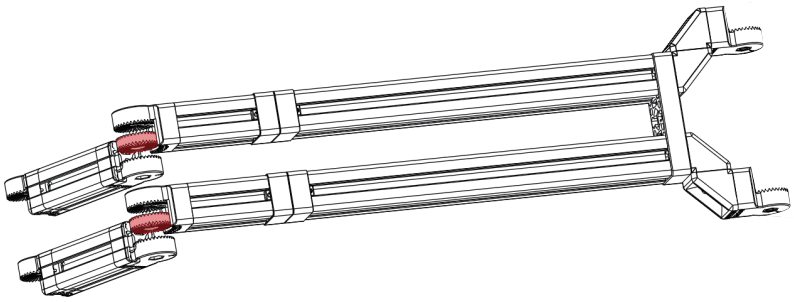





D-4

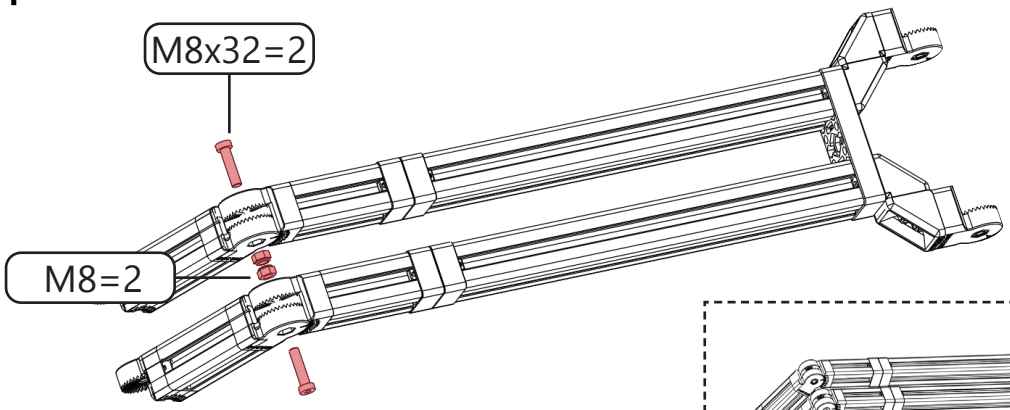

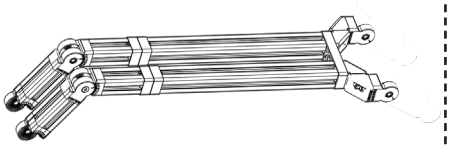



D-1

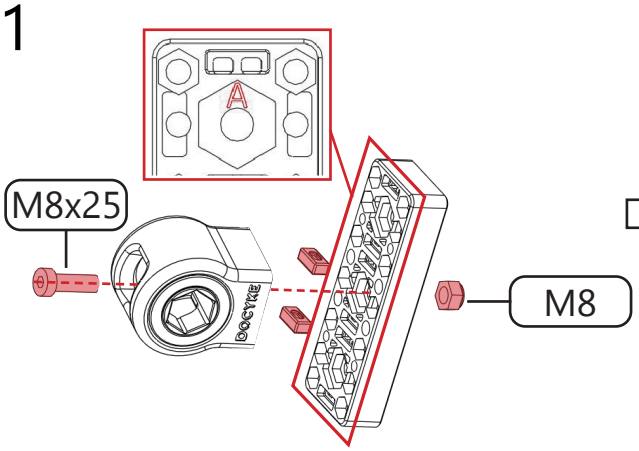




E-2

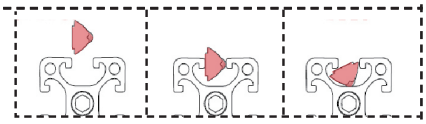


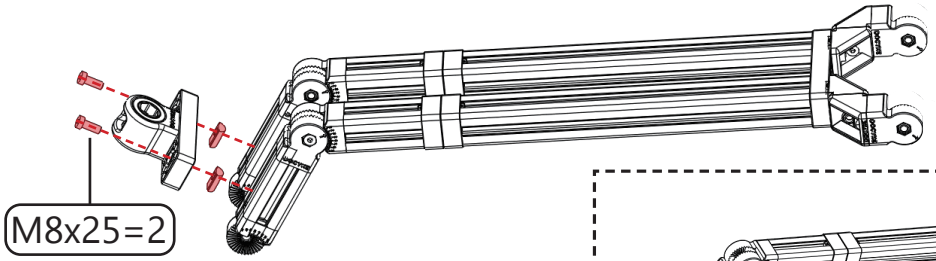



X2

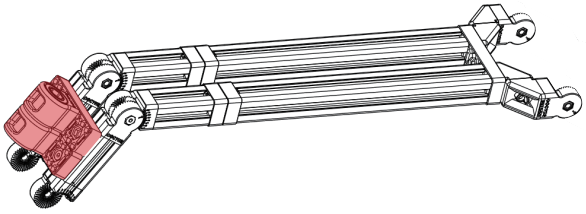


E-3




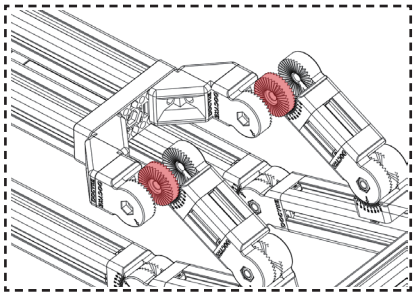

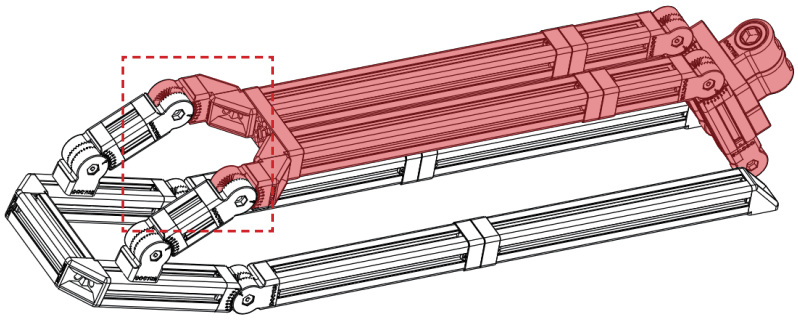


E-4

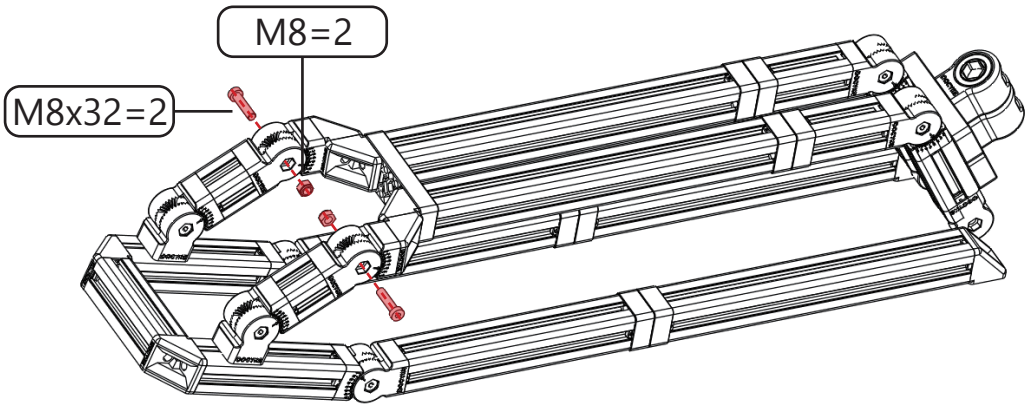


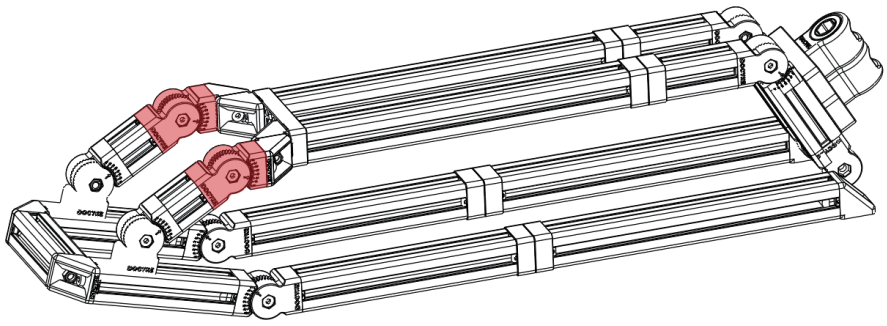


PART 1-2

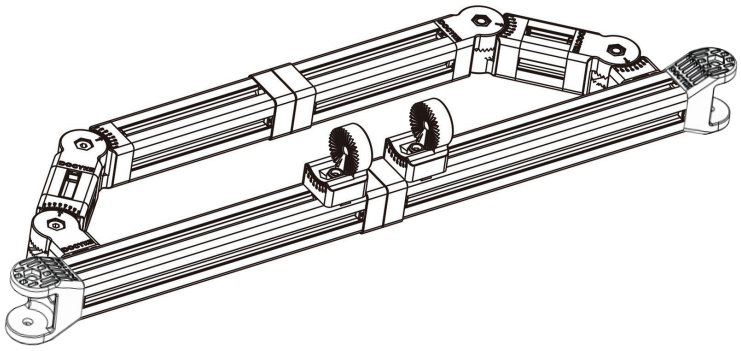



A-1

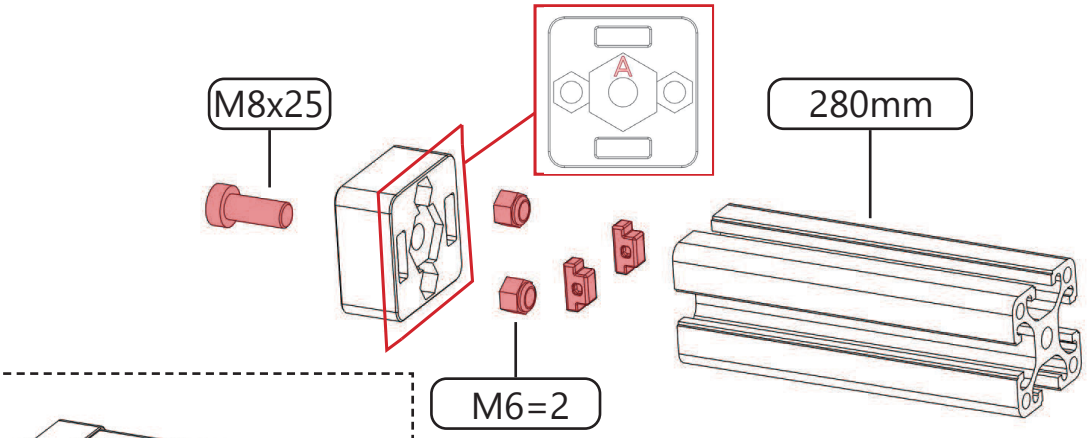

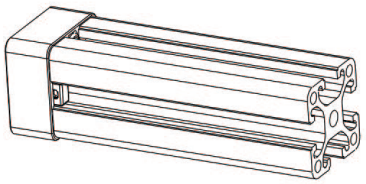


A-2

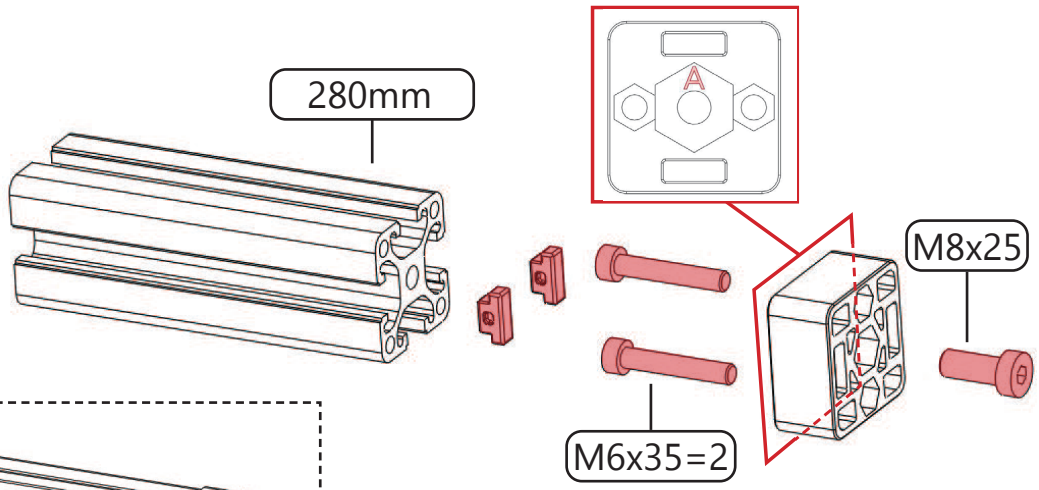


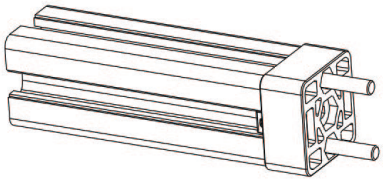


A-3


Tighten the two screws after connecting.

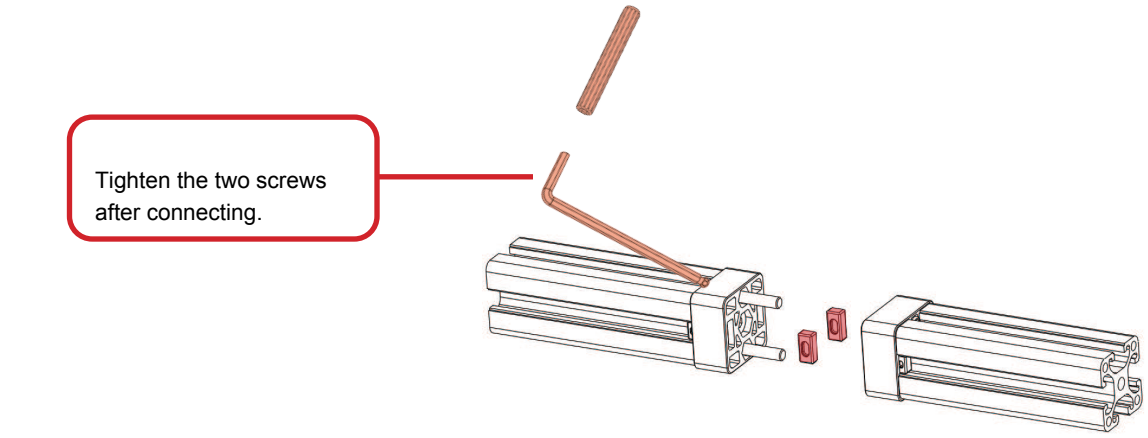

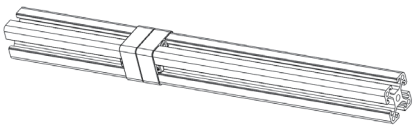


A-4

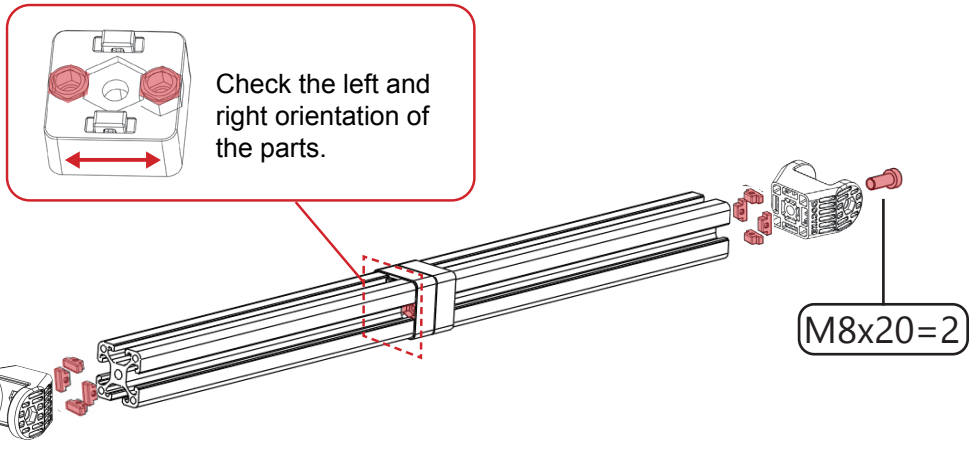


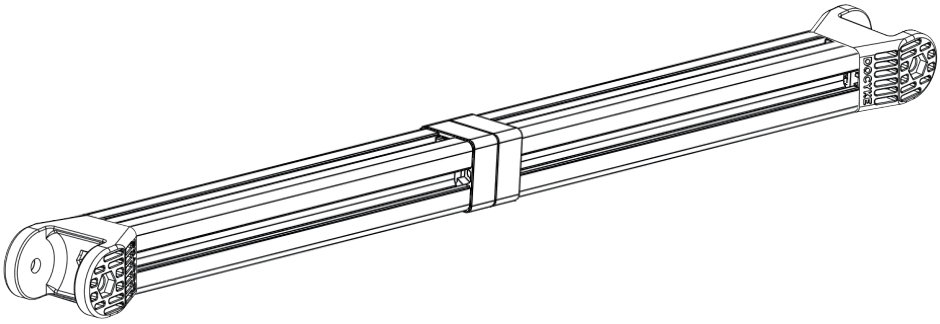


A-5

Tighten the bolts fully to prevent them from coming loose.

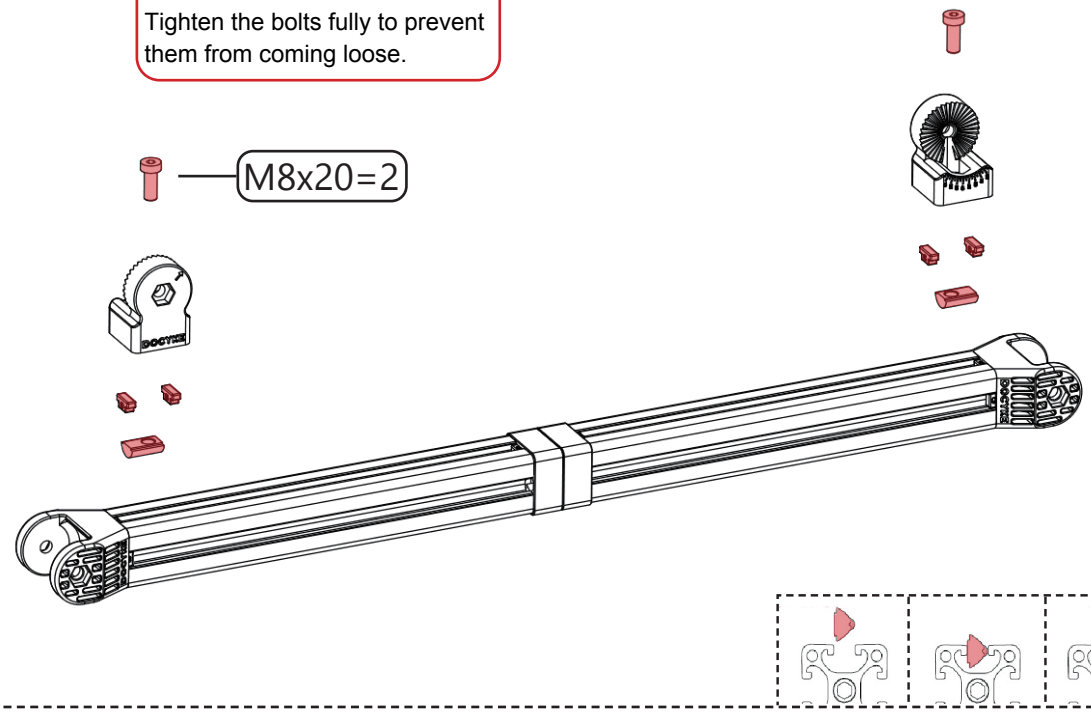


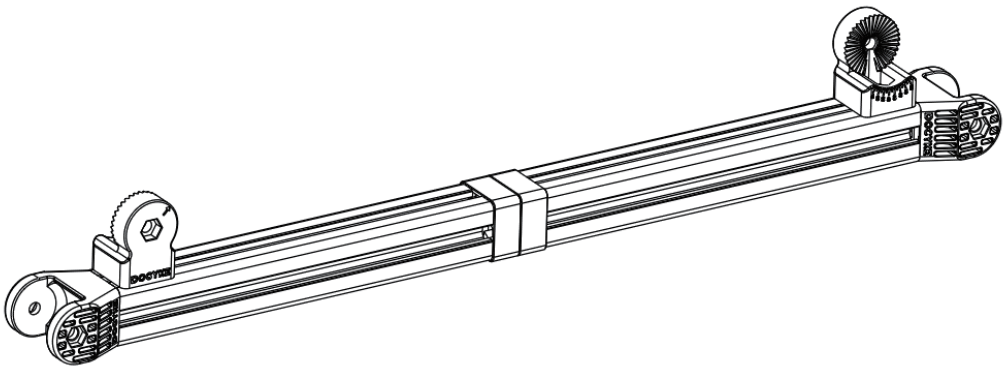


B-1

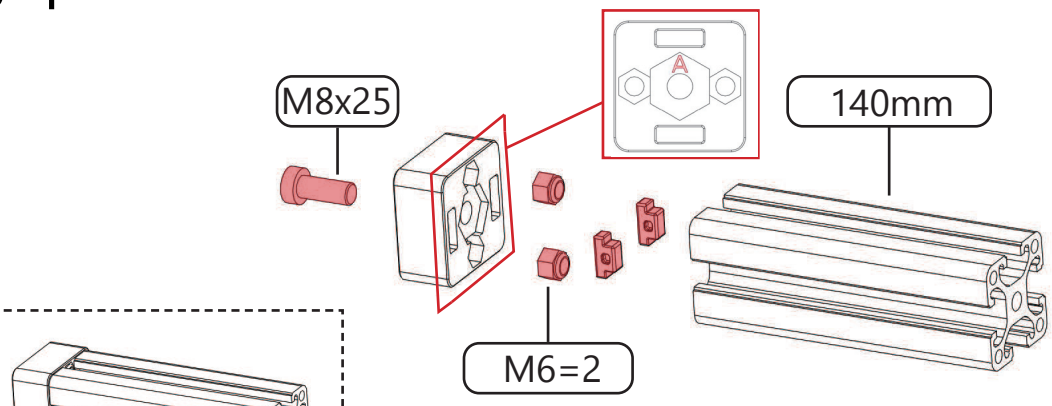


B-2

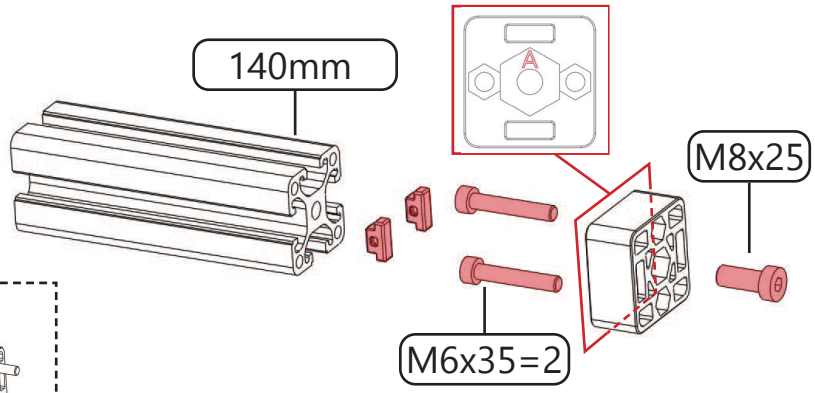





B-3


Tighten the two screws after connecting.

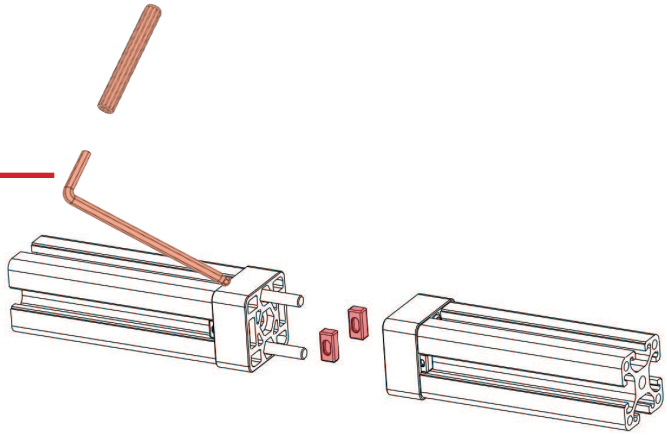





B-4

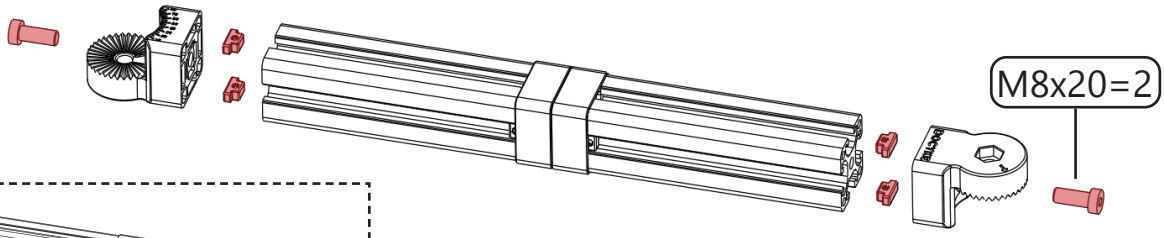





B-5

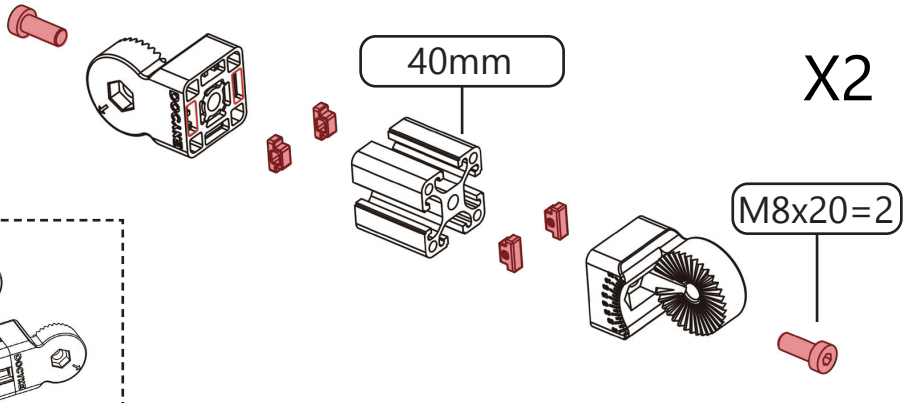





B-6

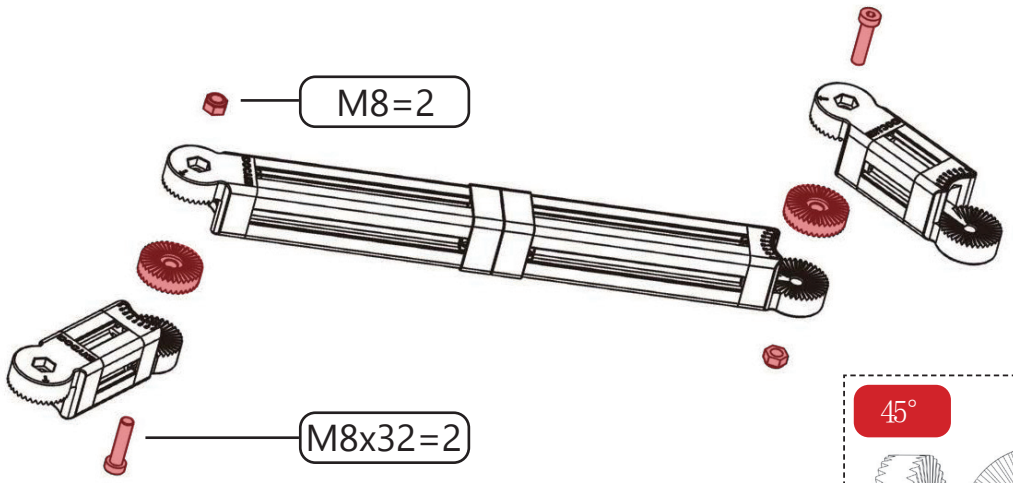





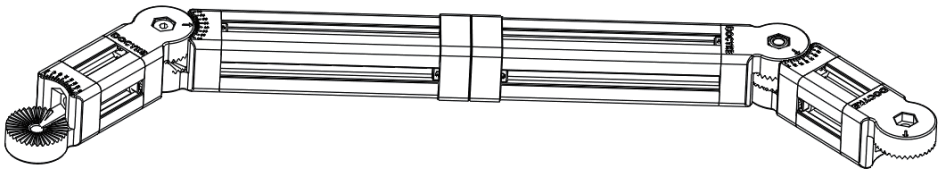


B-7

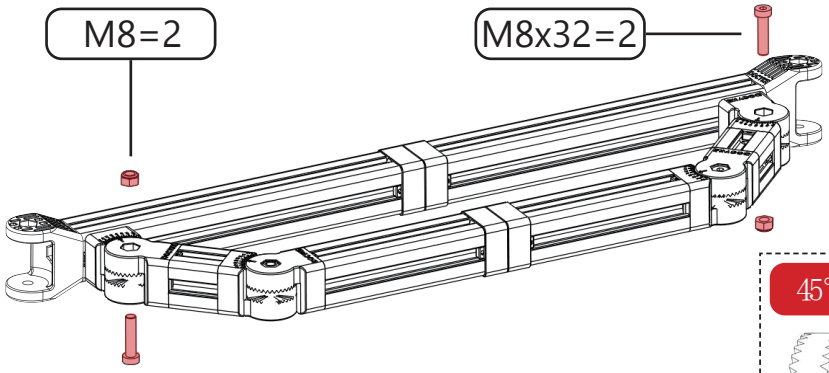




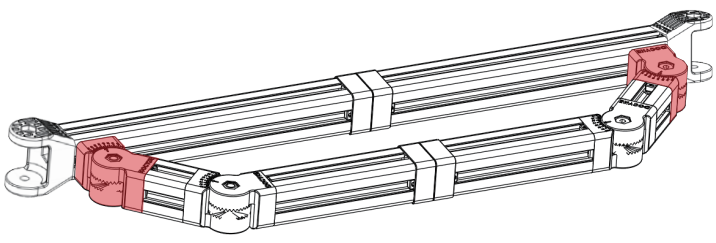


B-8

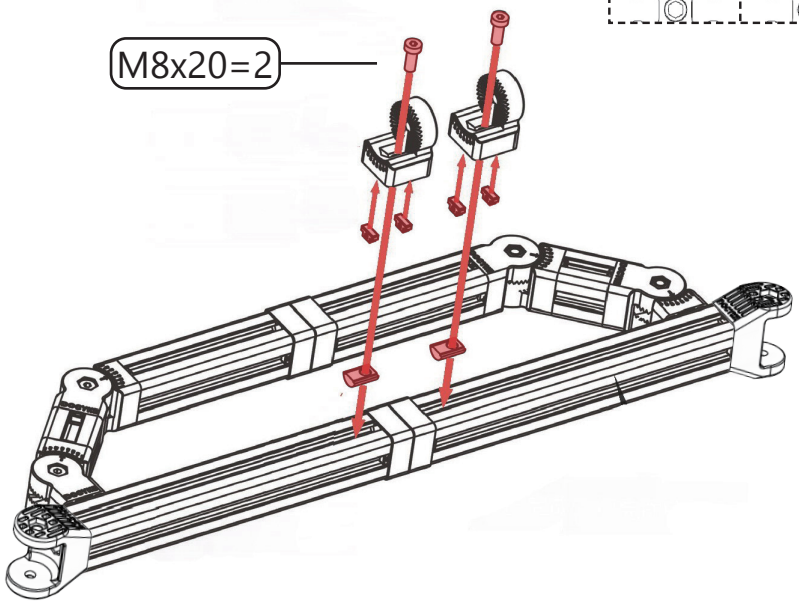

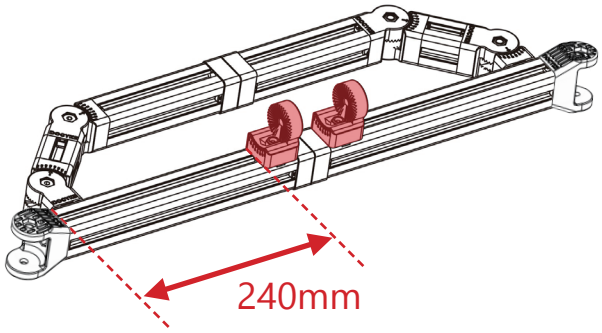


ASM.


A

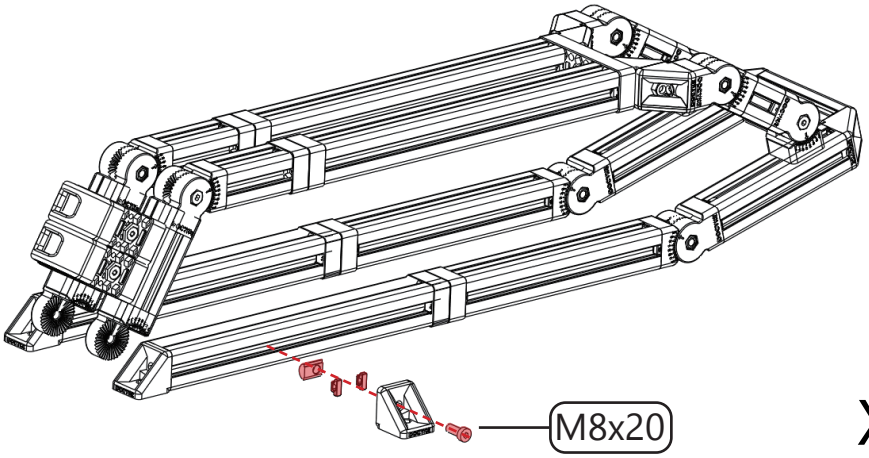



X2

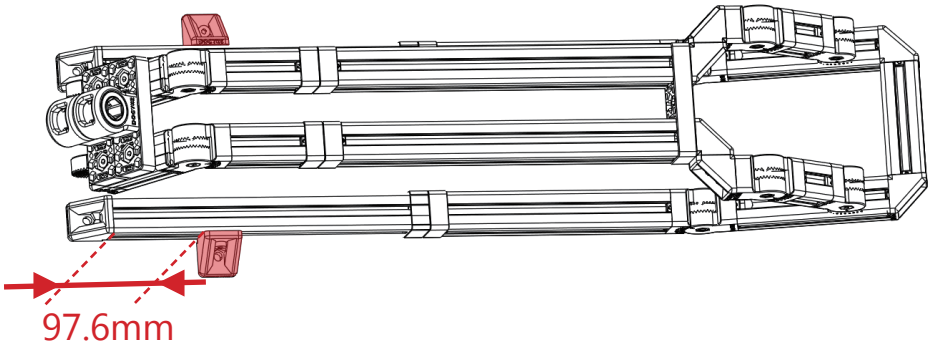


B

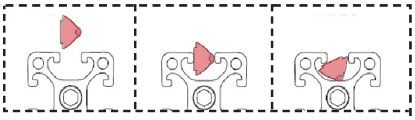


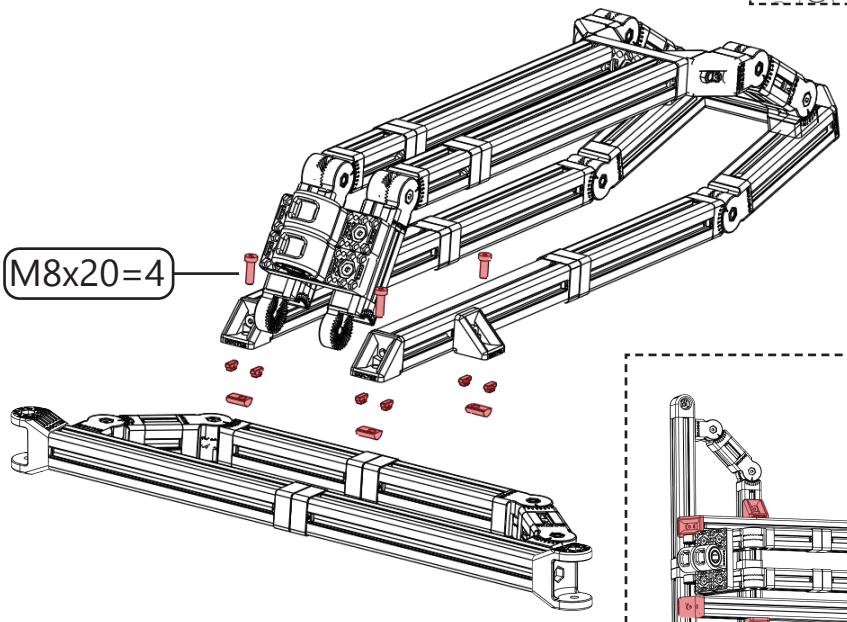

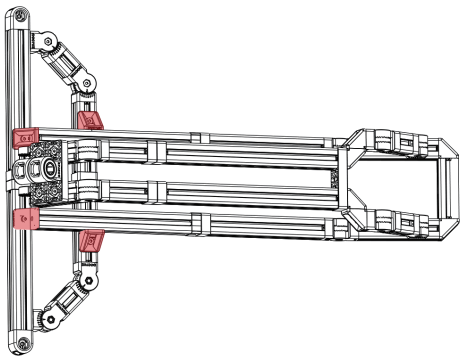


C




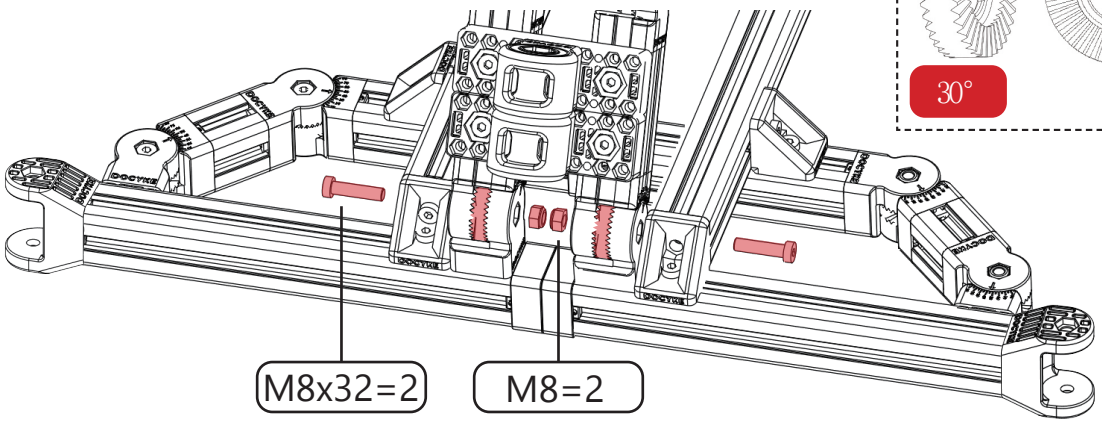


2 PART


A

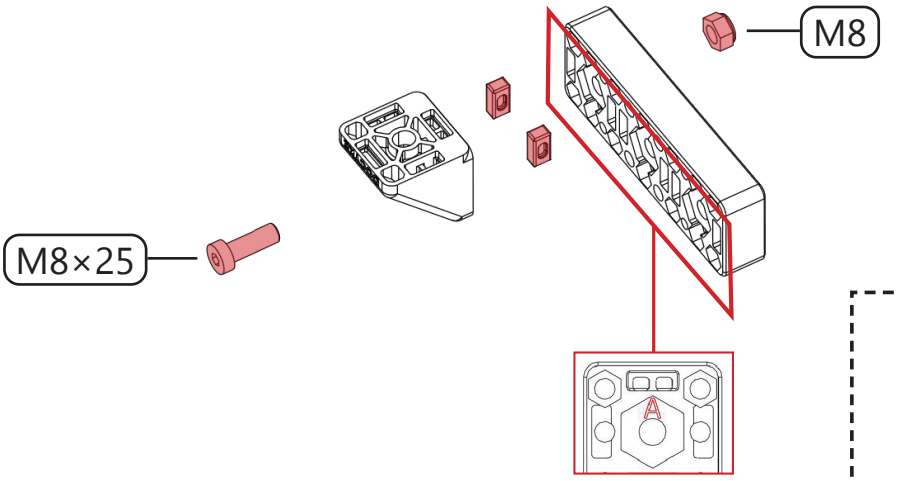




B

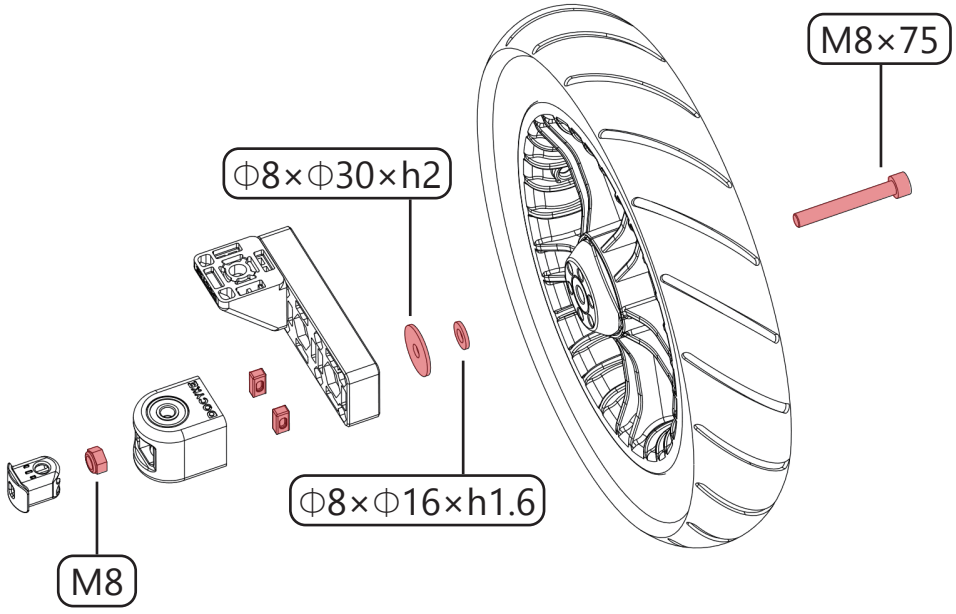

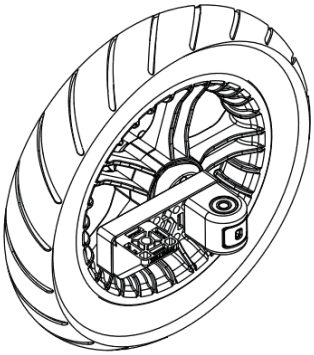



As shown in the figure, assemble 2 components.

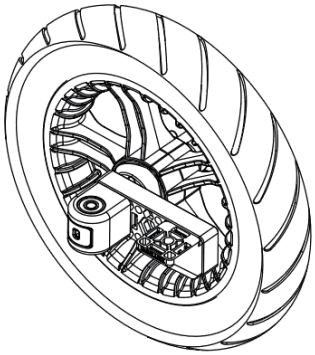


3 PART


A

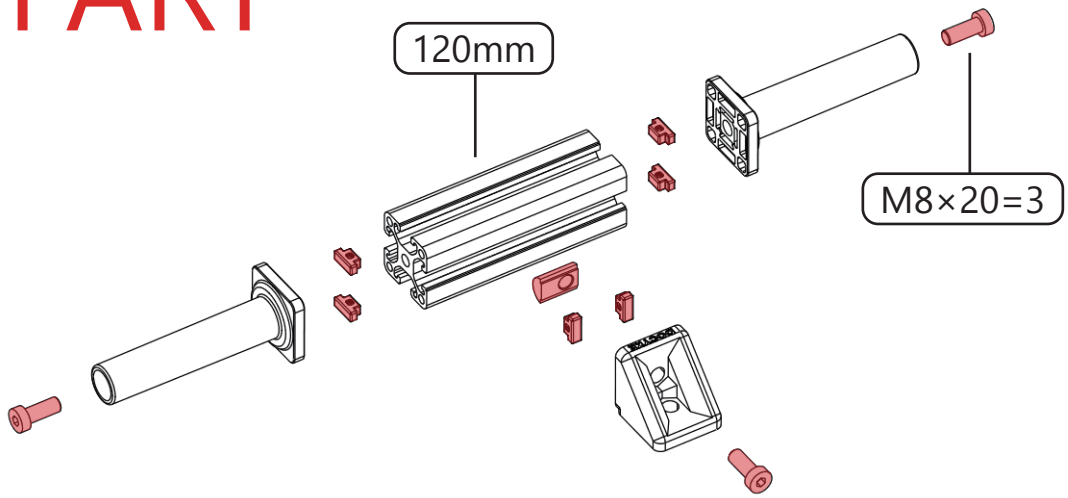

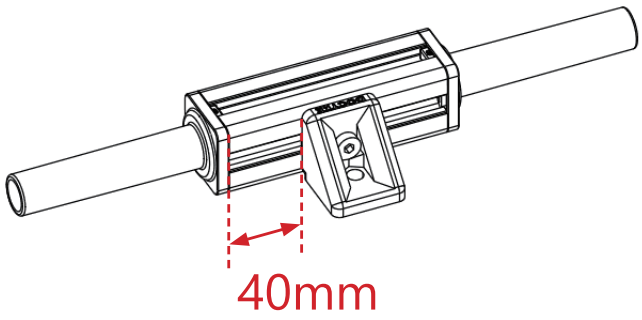


B

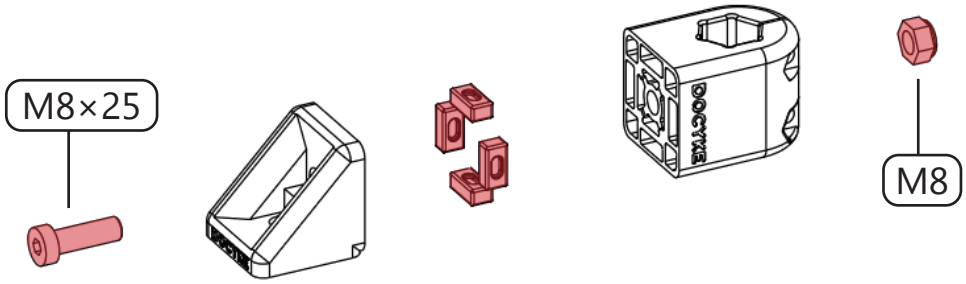





× 2


C

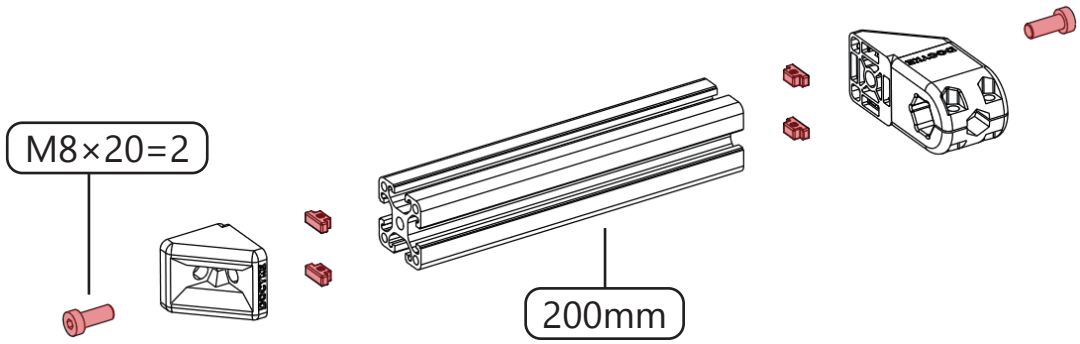

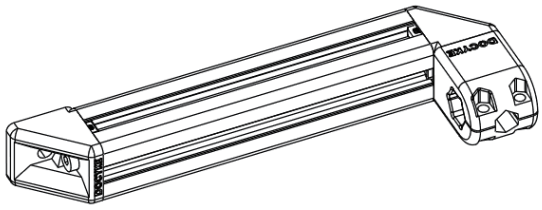



D

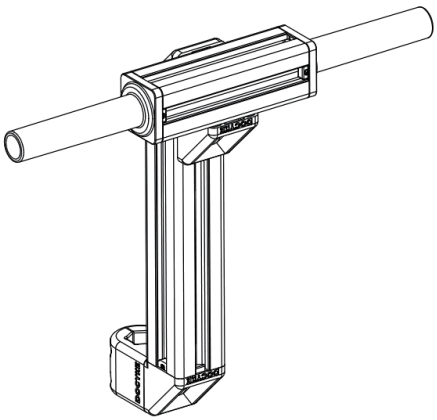

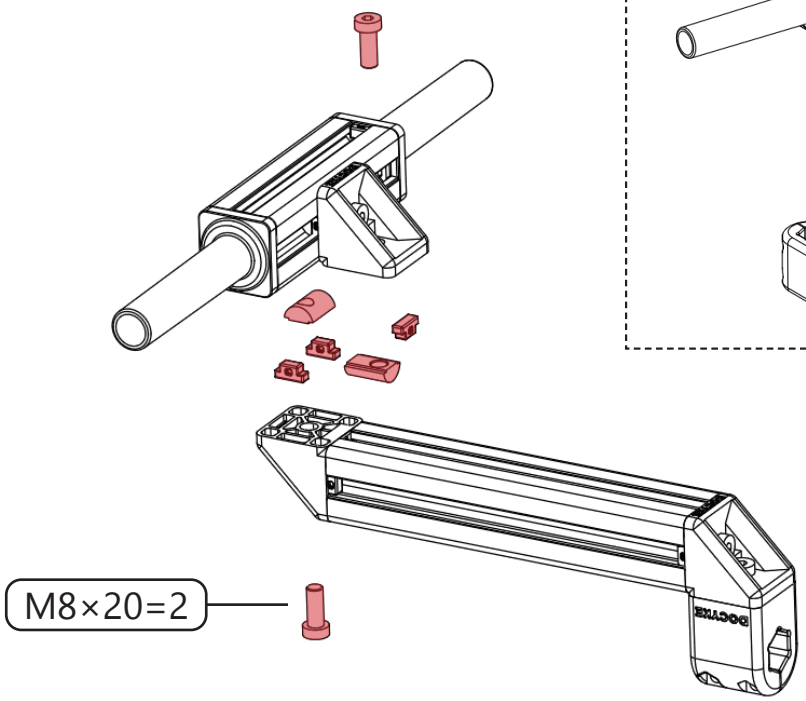


4 PART A

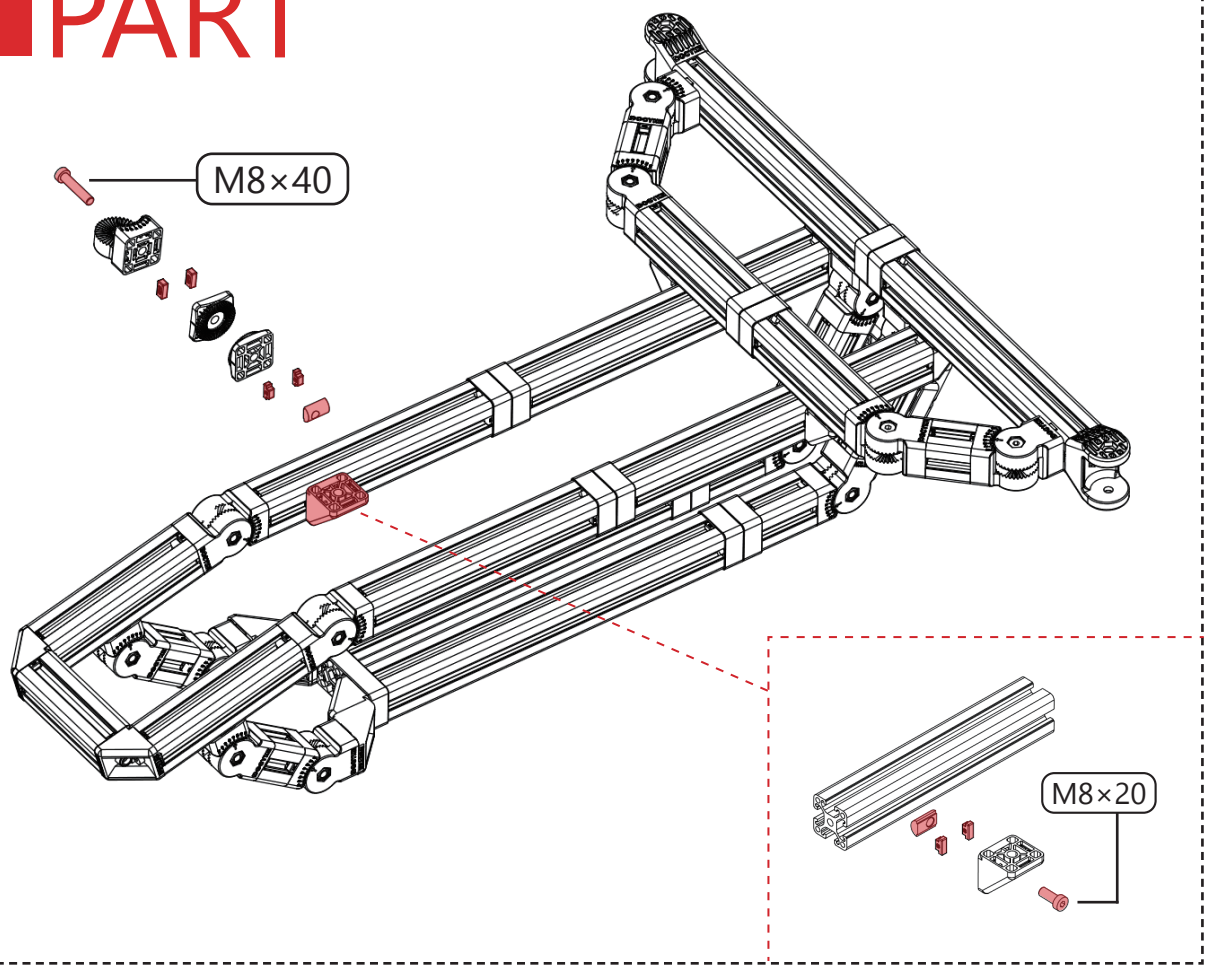

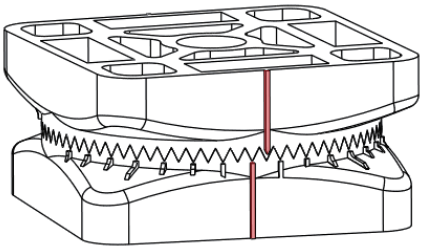


Toothed joint: each mark is 10°, and each increment is 5°.


5°

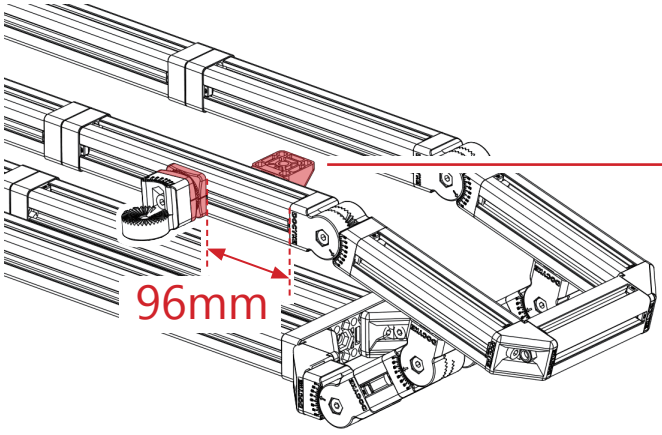


Do not tighten the screws until the toothed belt is firmly tensioned, then tighten the bolts well.


B

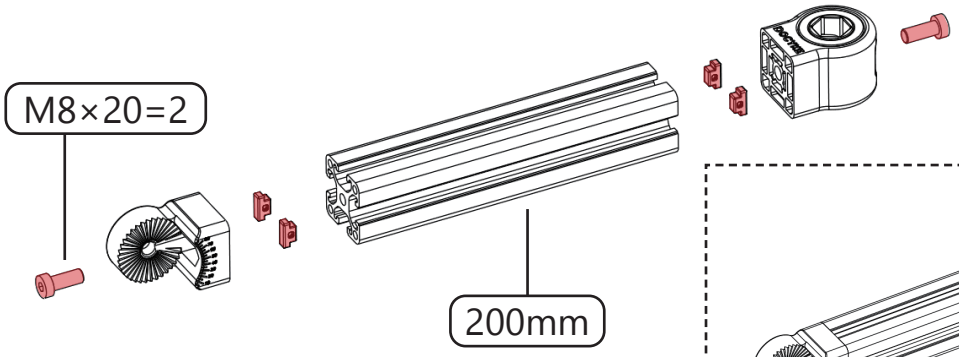


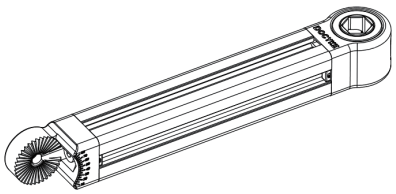


C

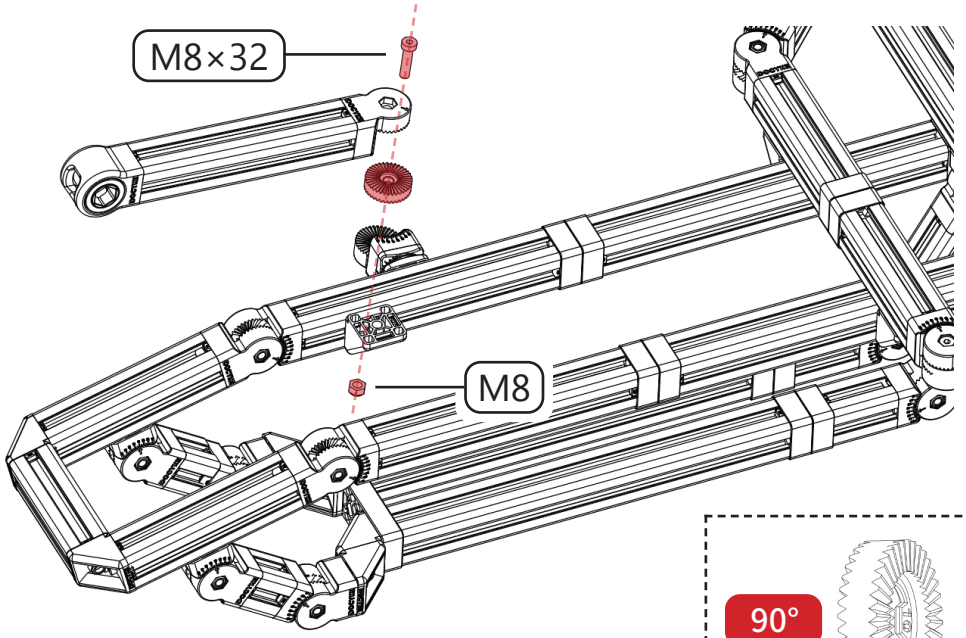


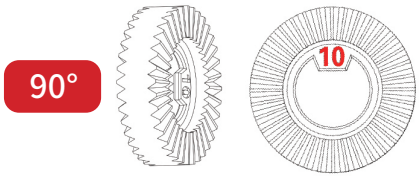

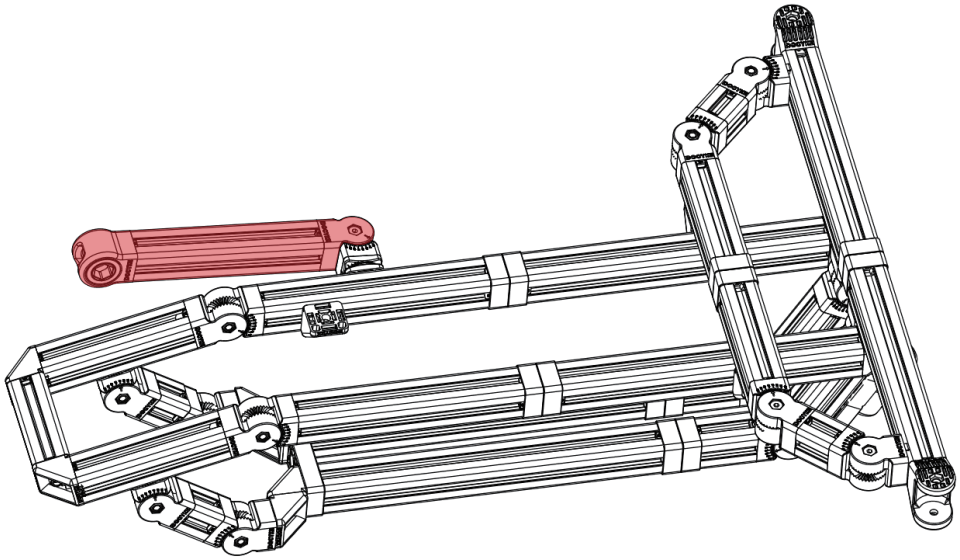


D

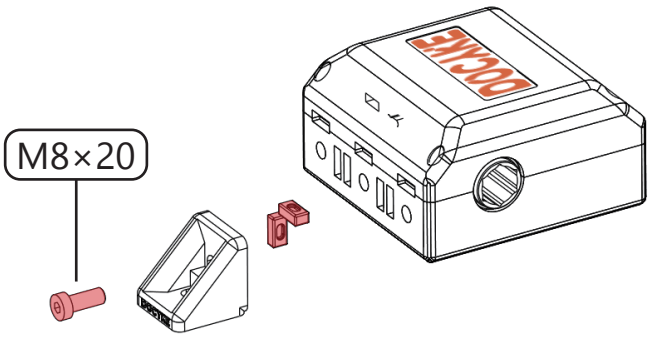




E

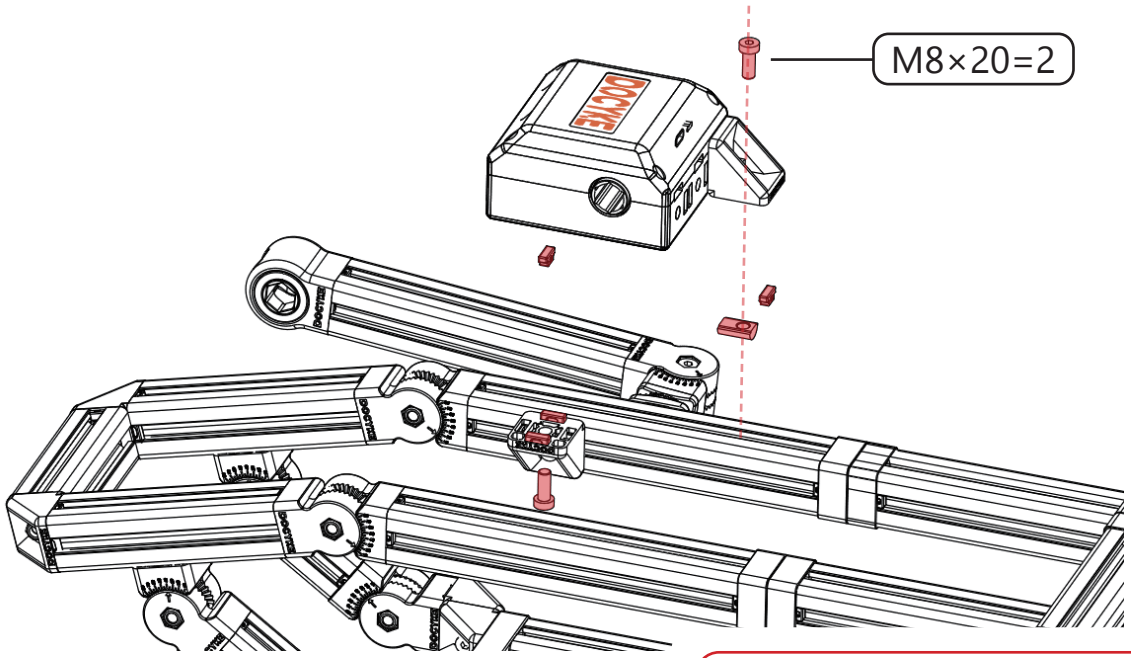


F

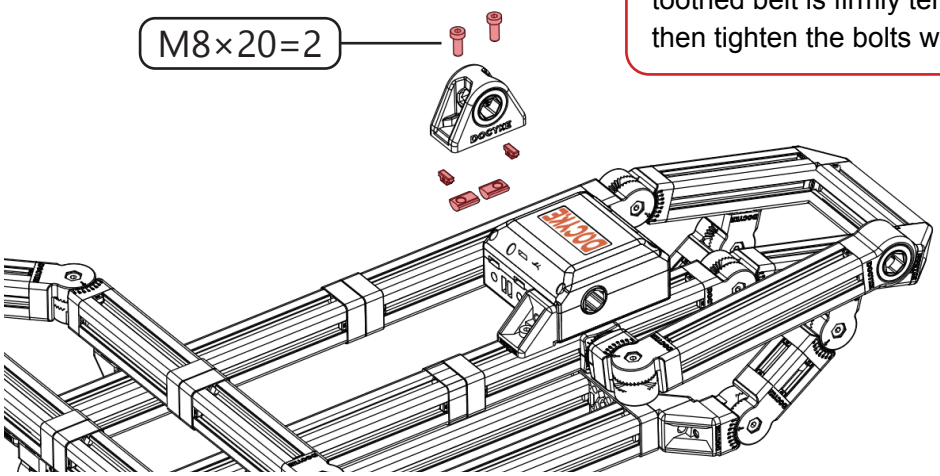



Do not tighten the screws until the toothed belt is firmly tensioned, then tighten the bolts well.

G

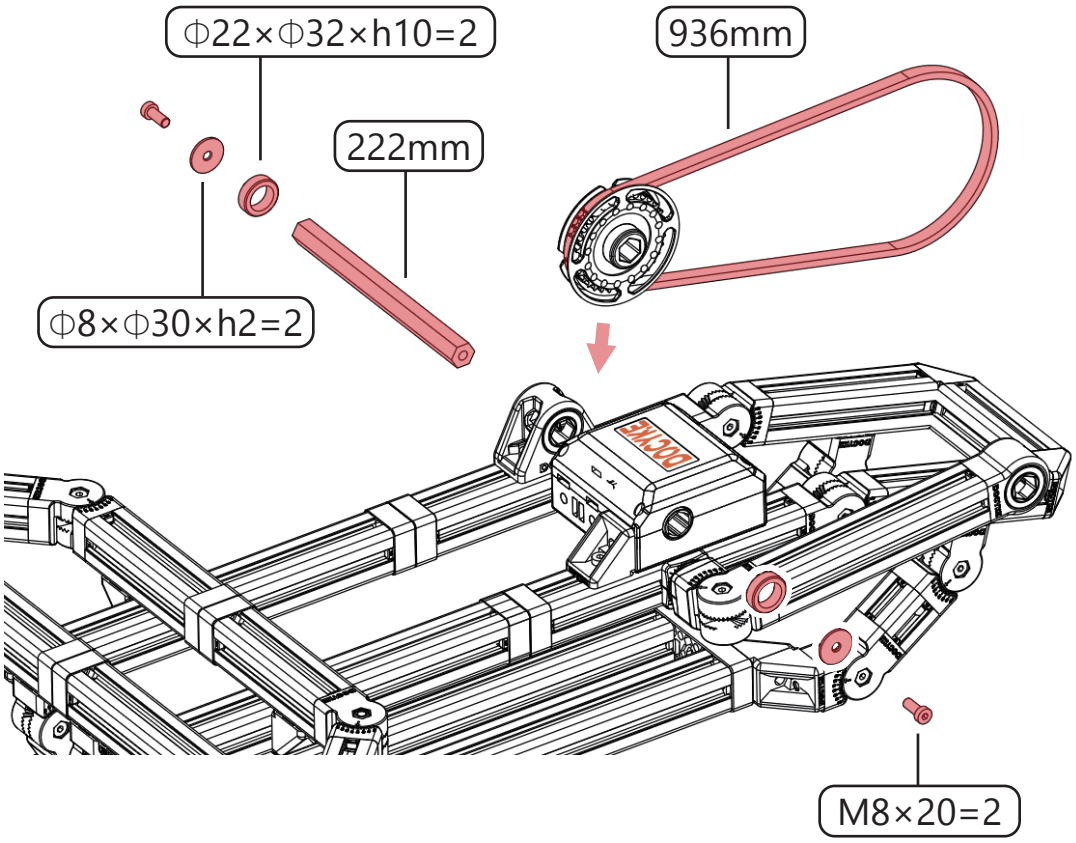


H

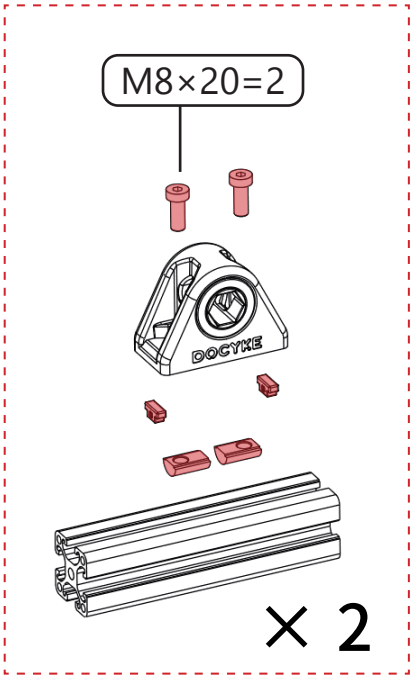


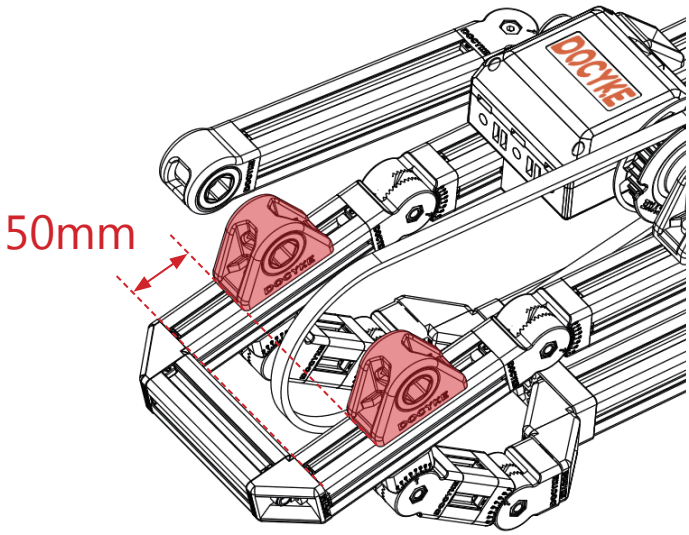


I

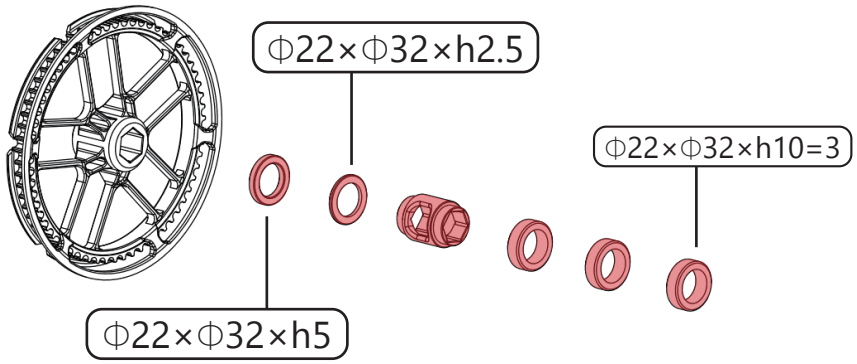
Φ22×Φ32×h2.5
Φ22×Φ32×h10=3
Φ22×Φ32×h5


J

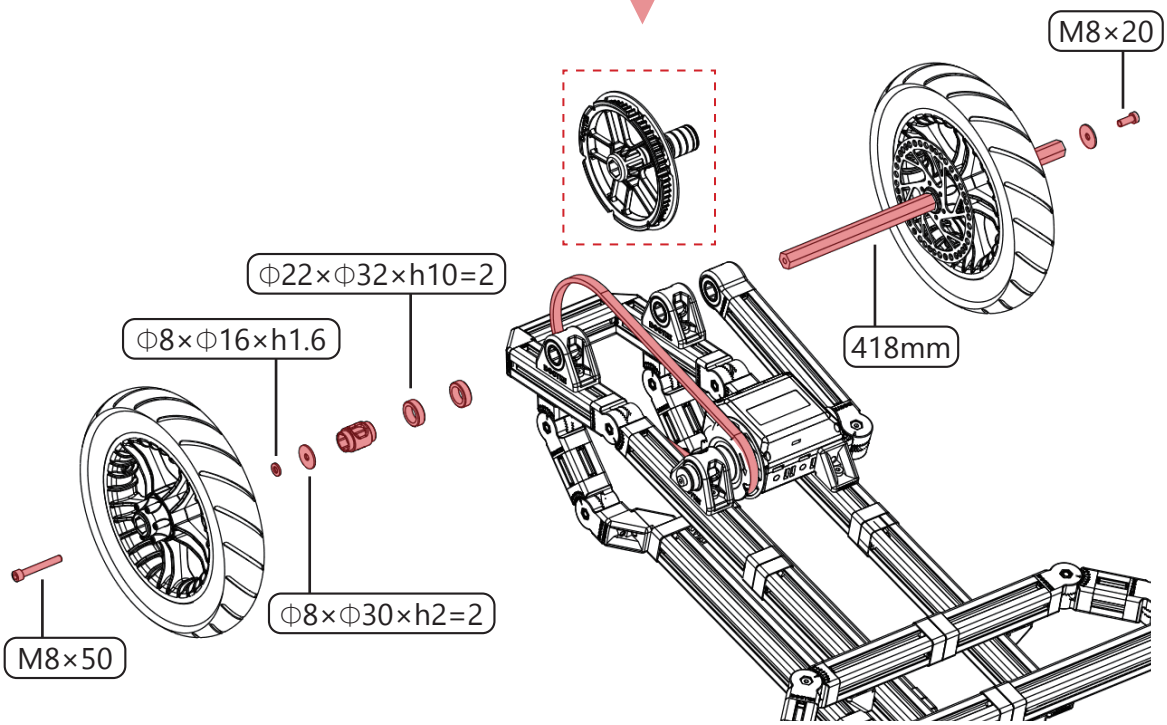
M8×20
Φ22×Φ32×h10=2
Φ8×Φ16×h1.6
418mm
Φ8×Φ30×h2=2
M8×50

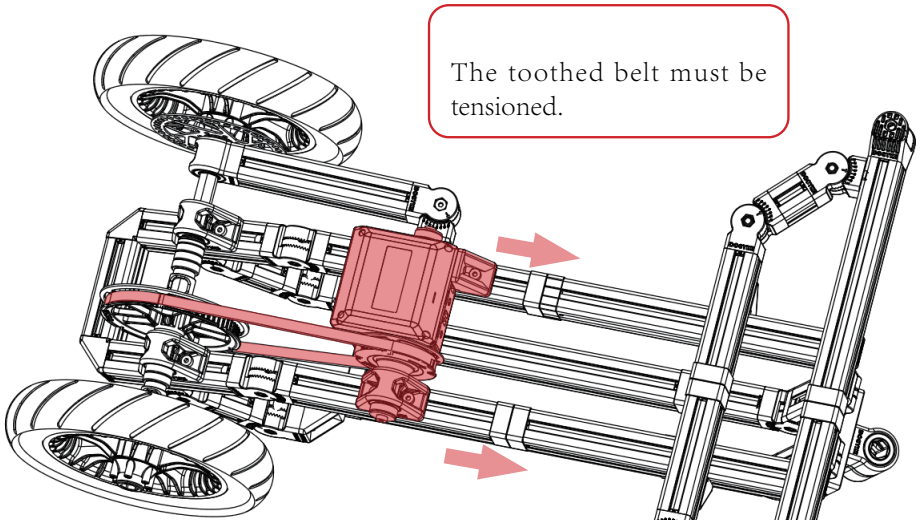
The toothed belt must be tensioned.


ASM.

A

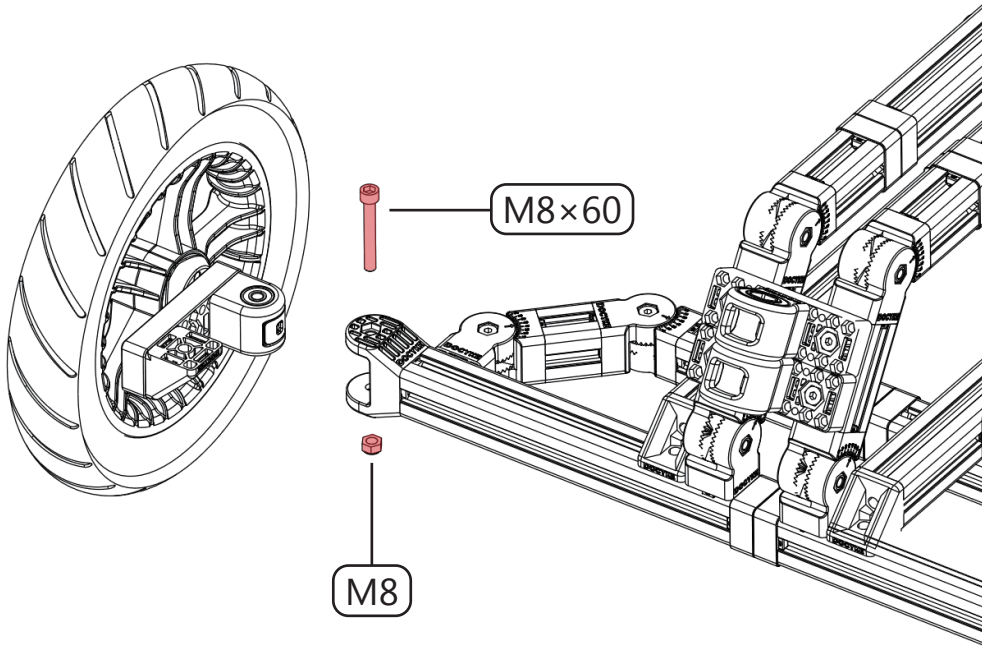


× 2


B

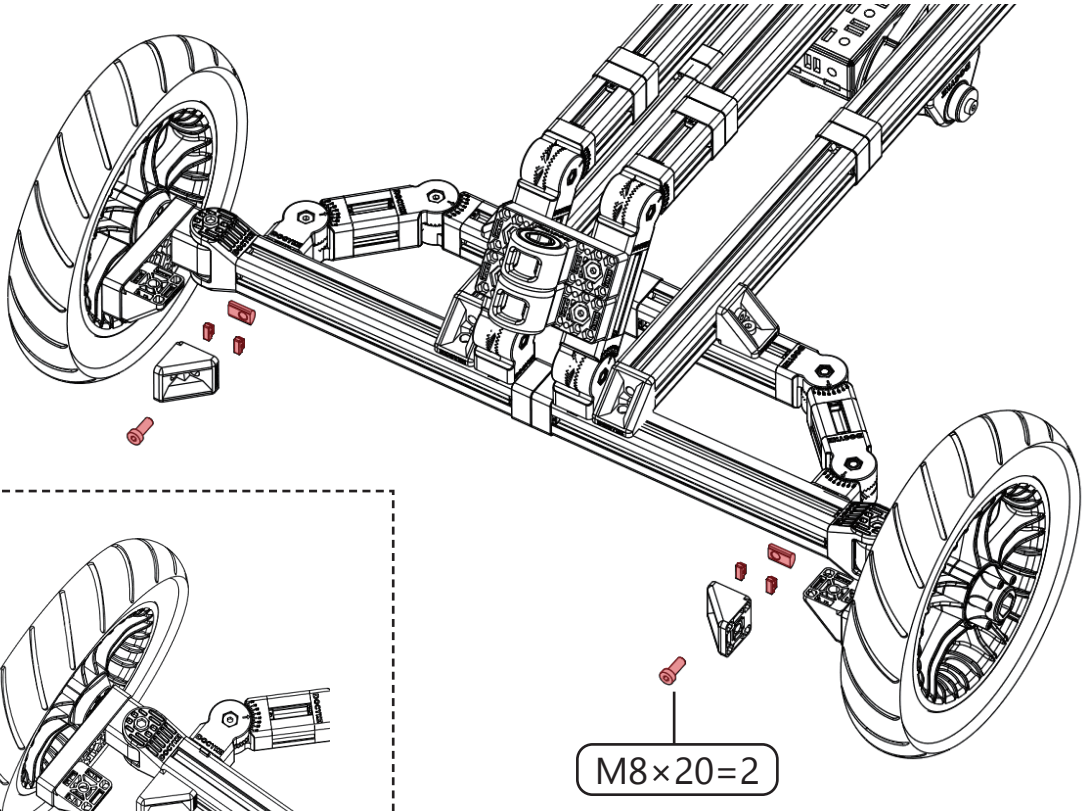


C

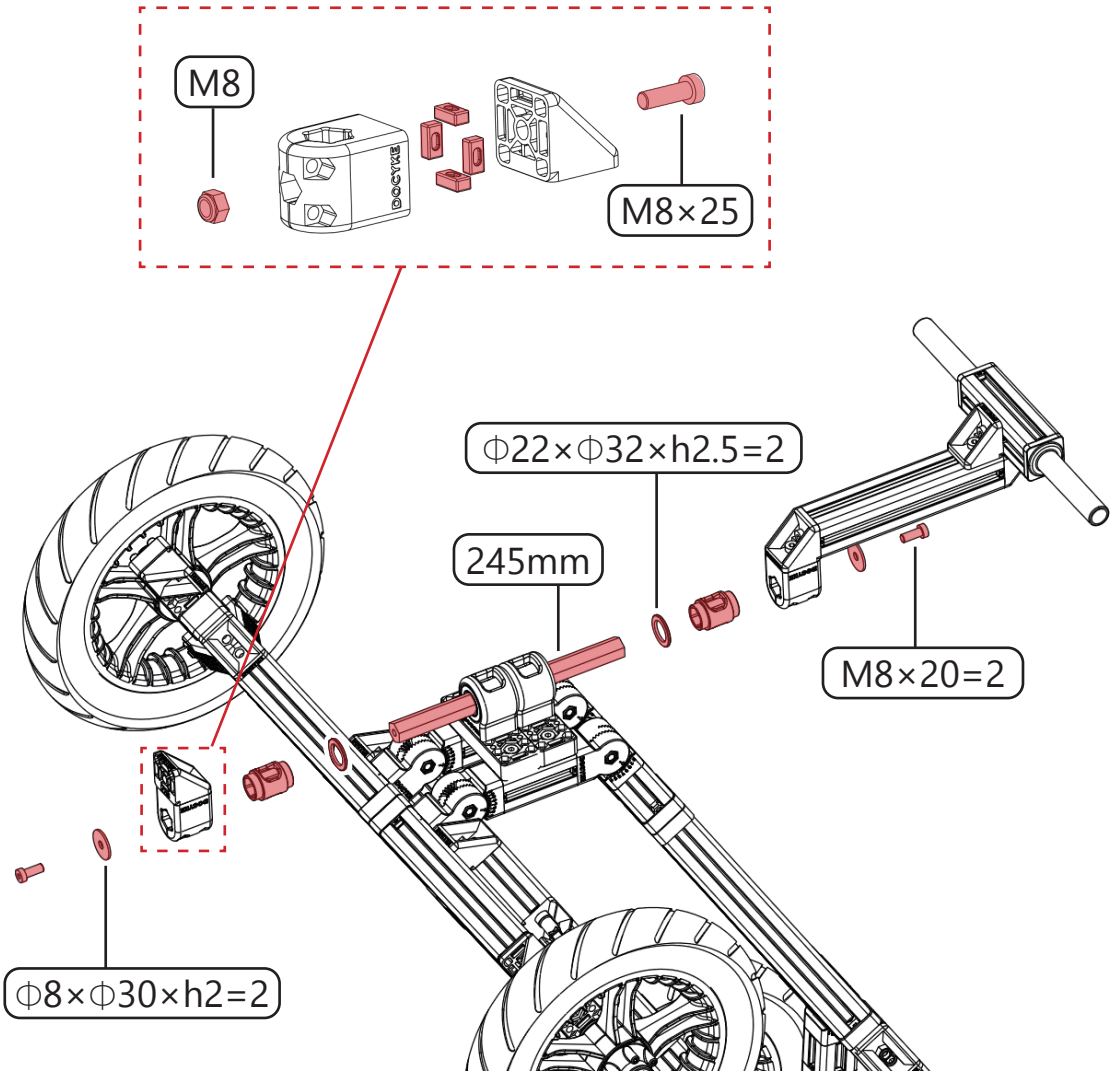


D

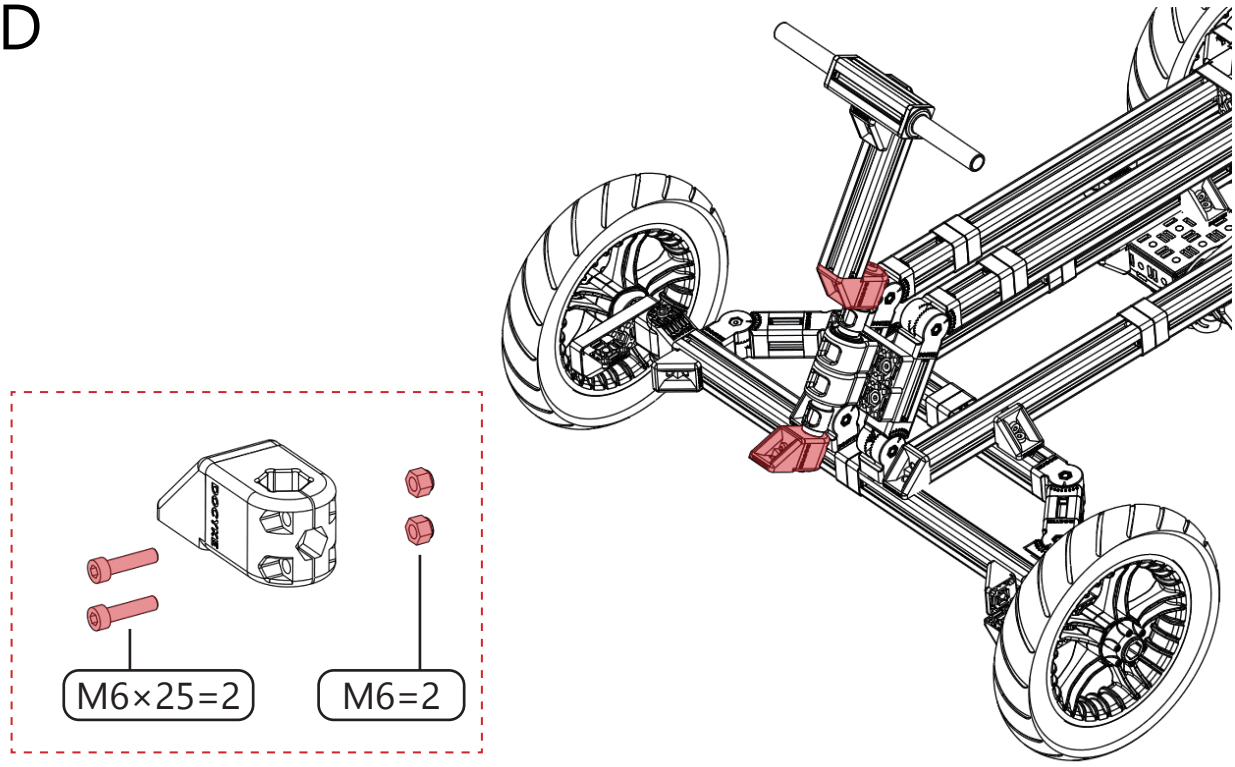


E

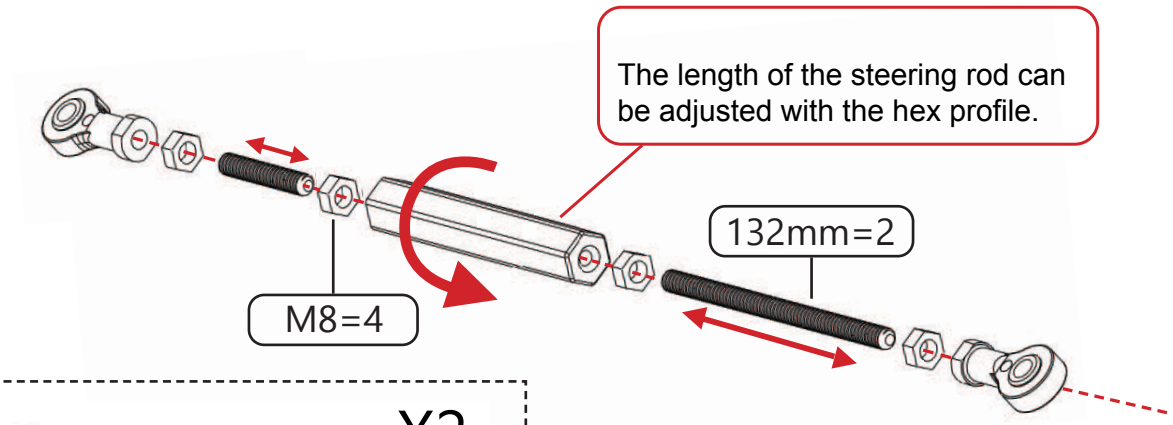

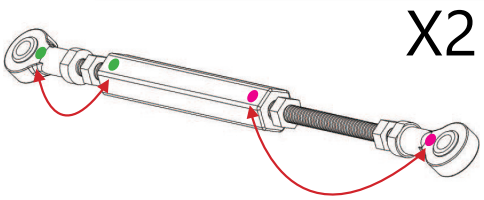


Install both ends of the hex profile according to their color.

F

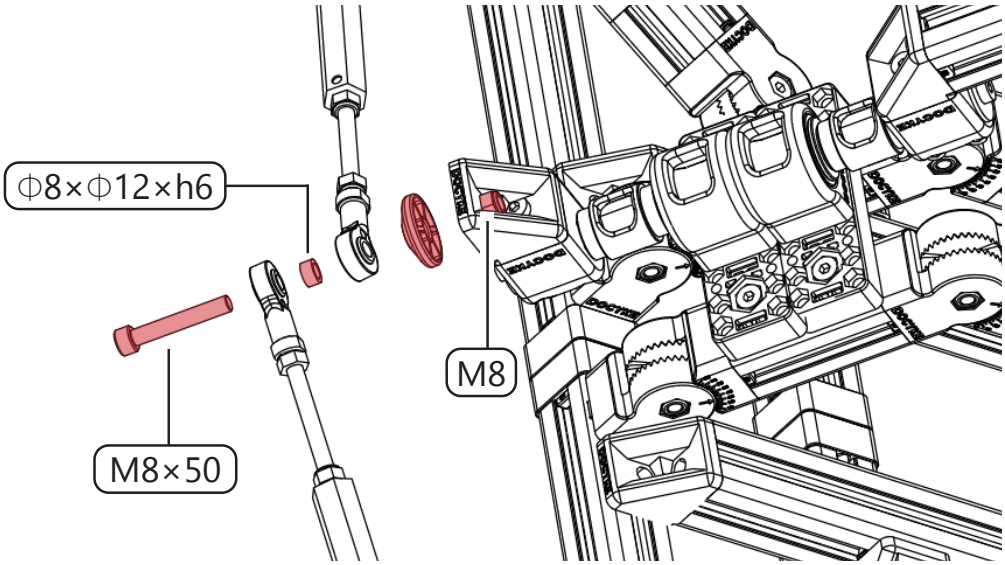


G

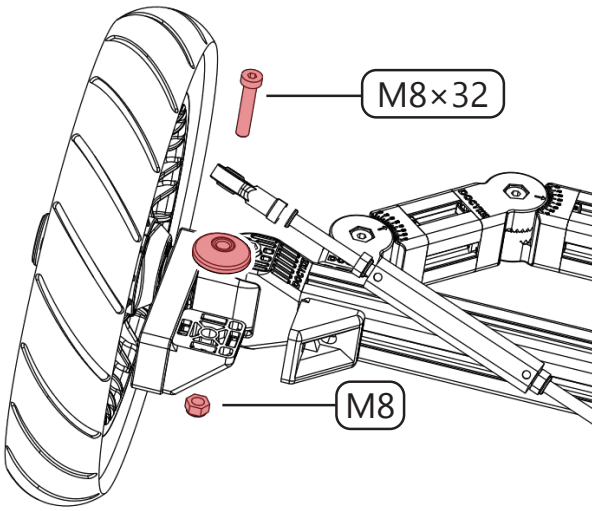



× 2

H

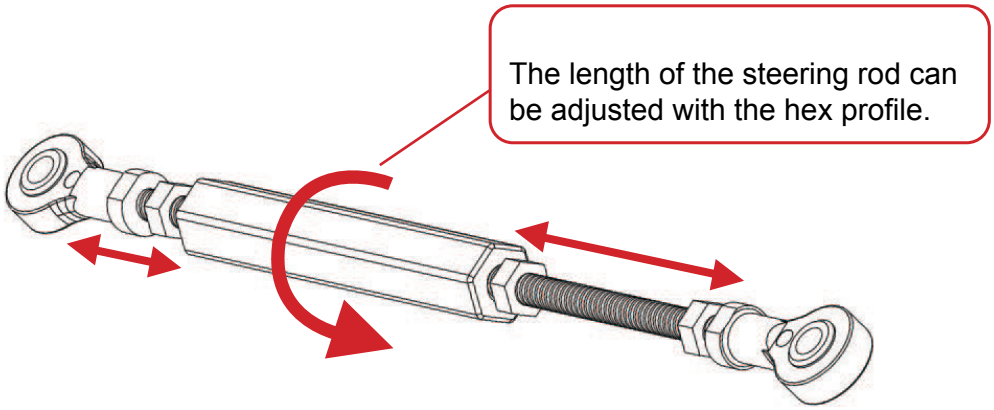


Make sure the two wheels are parallel when the rider is seated, then lock the nut so that it cannot come loose.

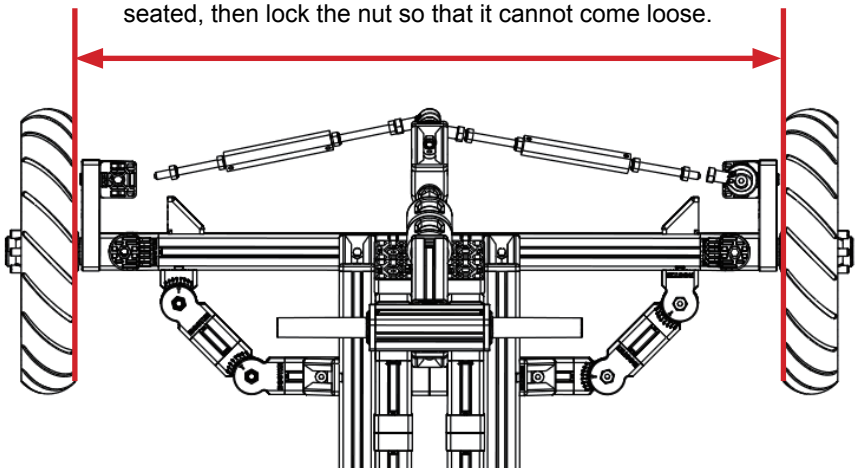

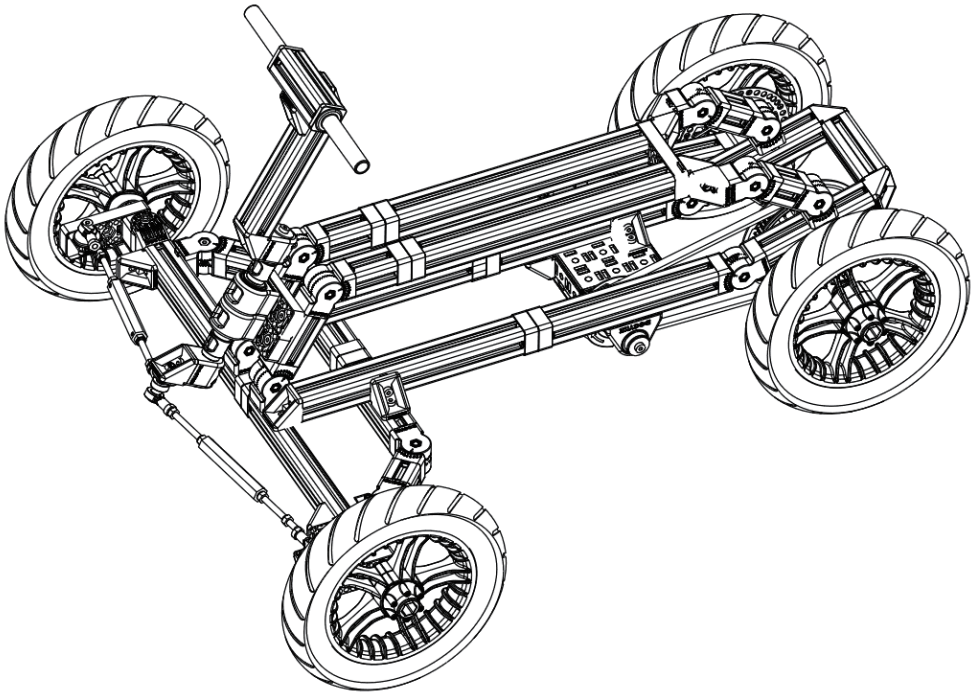


I

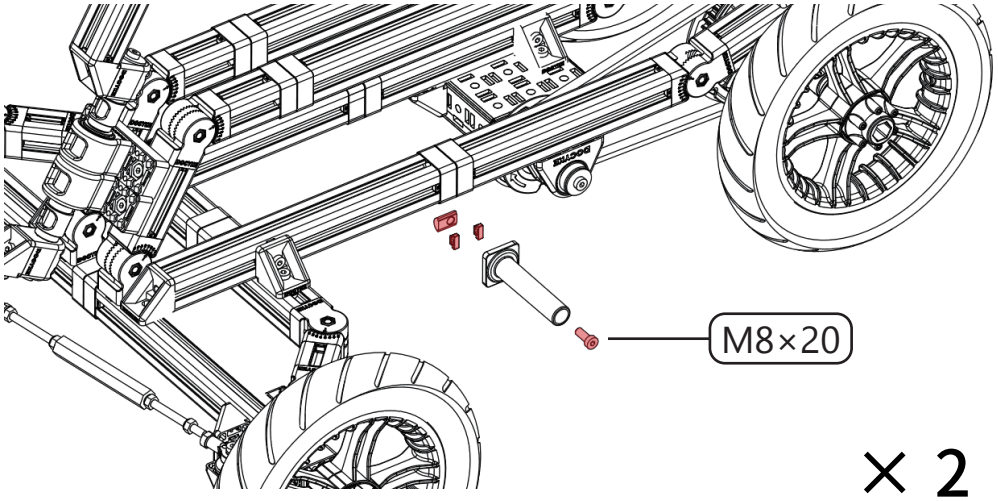


× 2


J

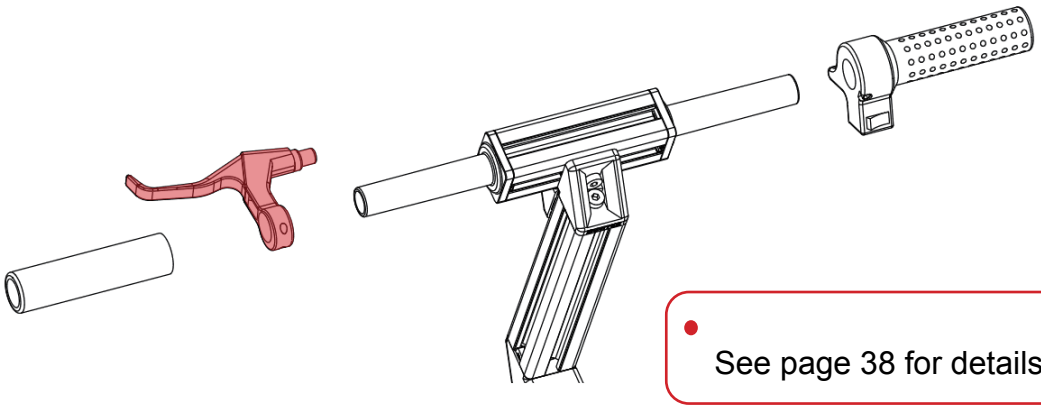


See page 38 for details.

K

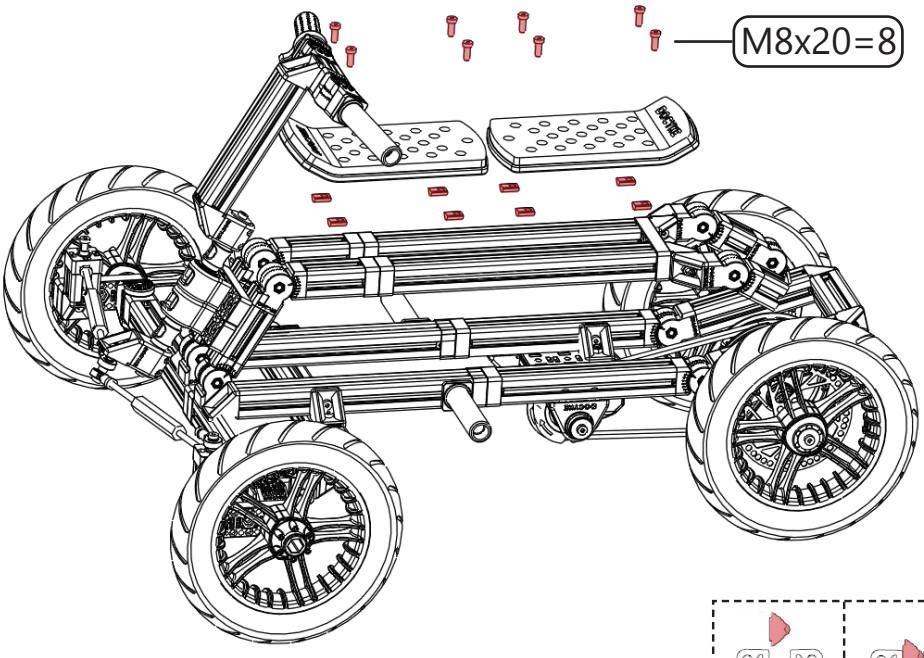

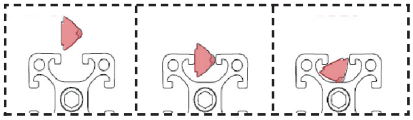



L

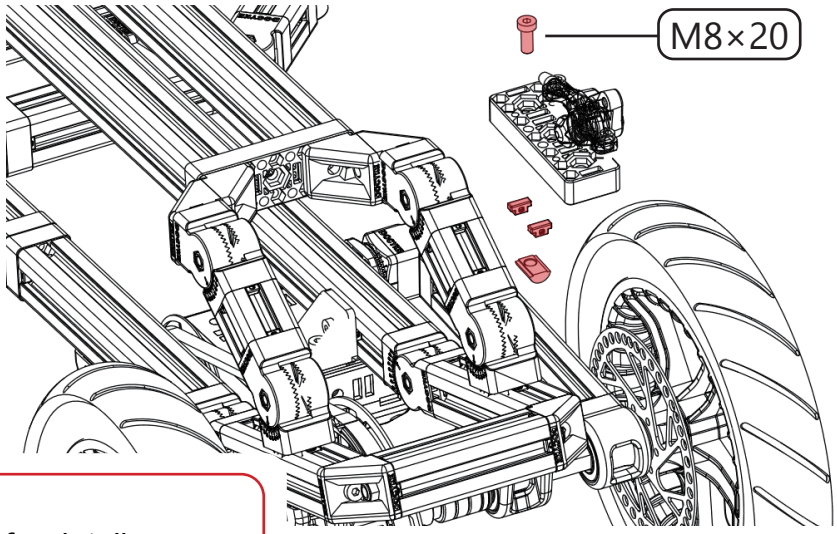


See page 37 for details.


M

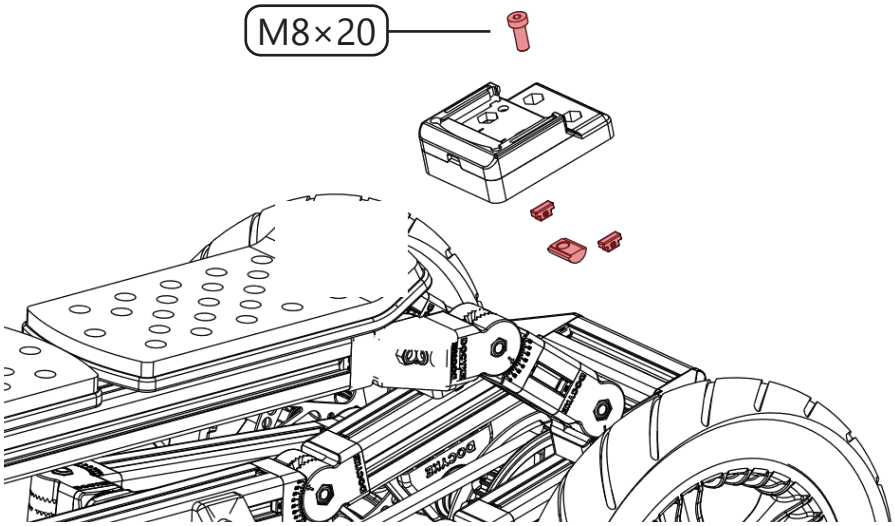


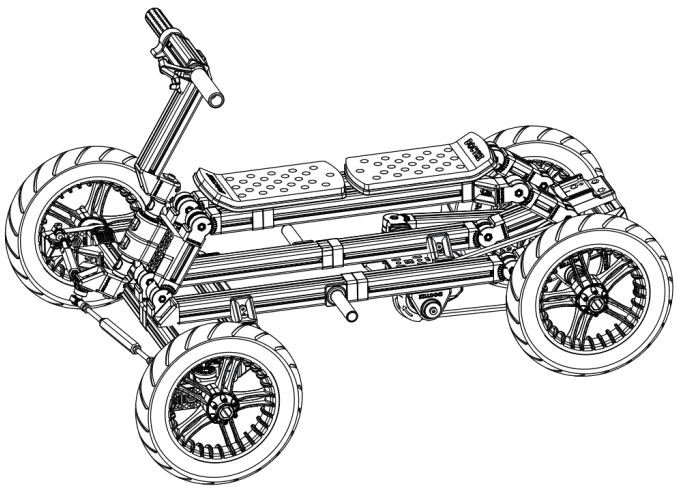


Brake kit






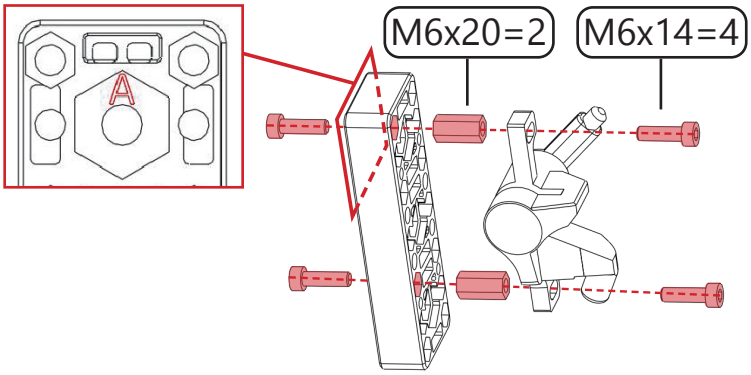


1

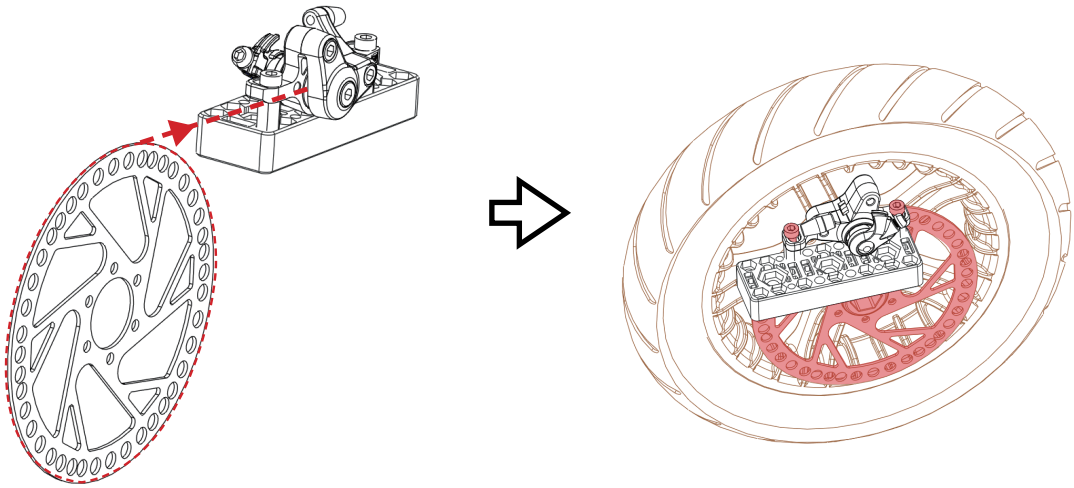


2

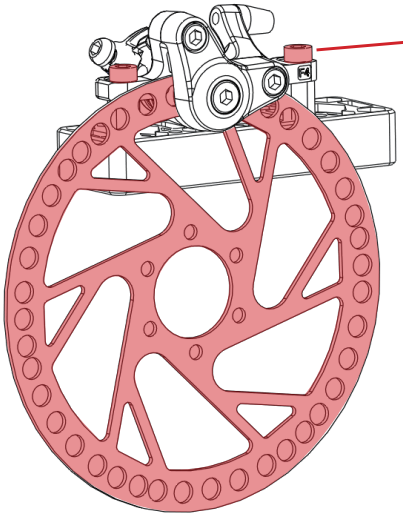


Adjust the gap between the brake disc and the brakes, then tighten the screws.

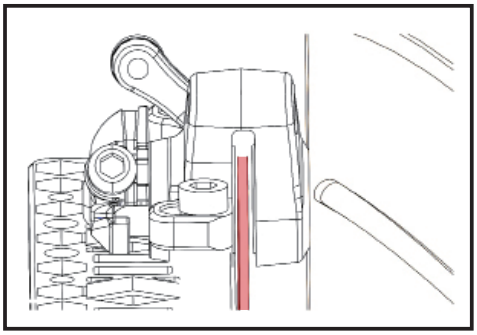


Secure the cable.

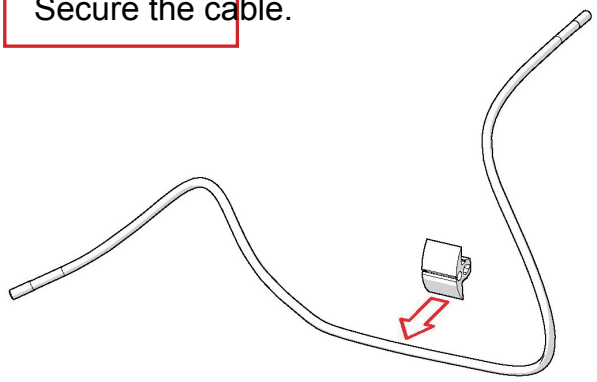


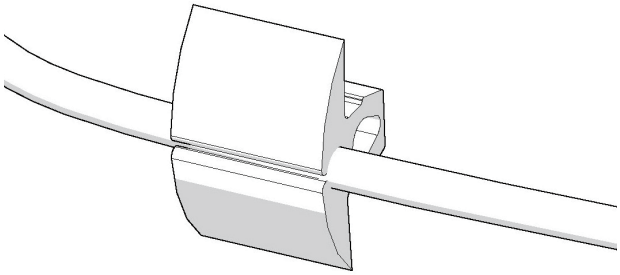


1

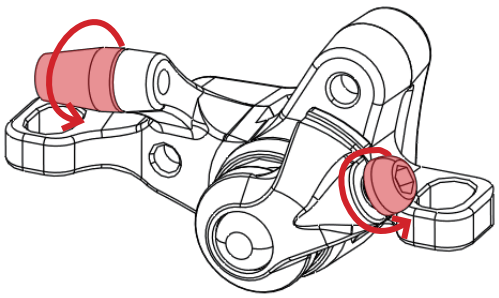


2

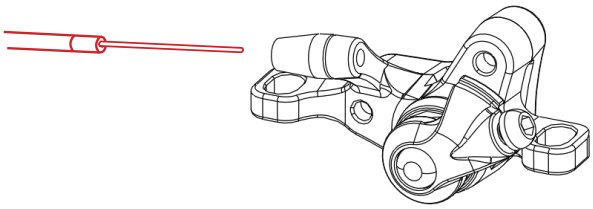


3

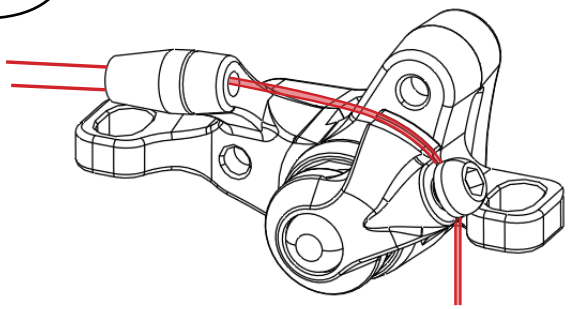


4

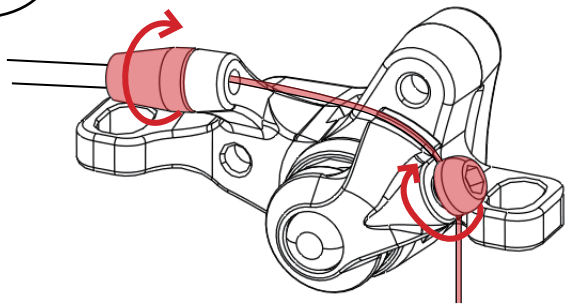

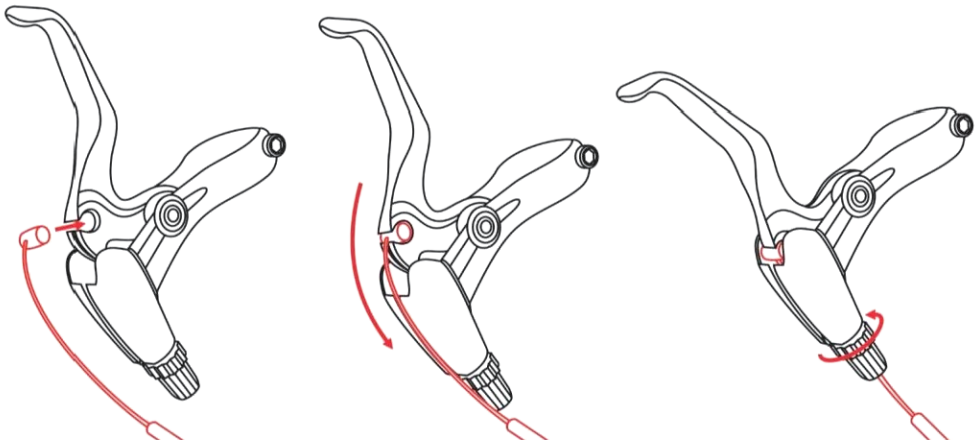


Electrical connection diagram

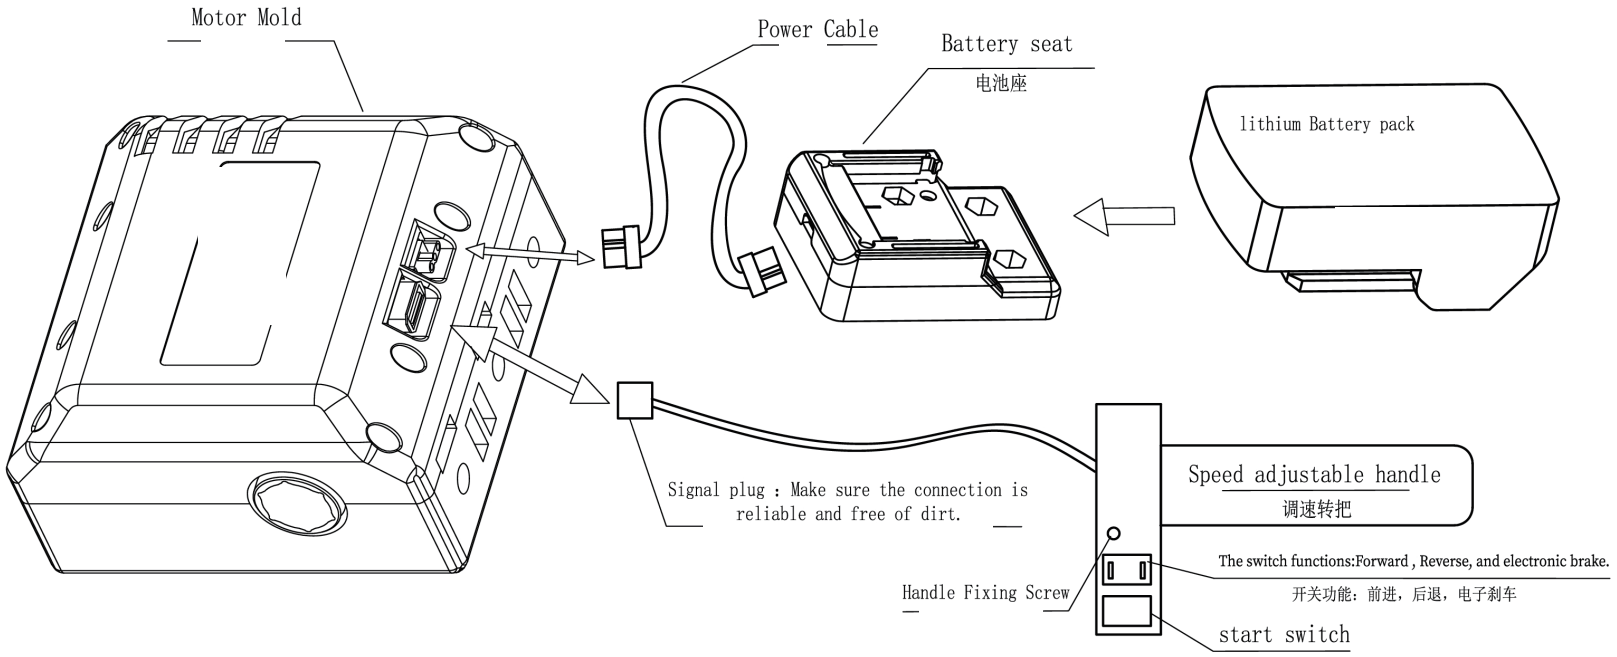



Introduction of High performance brushless motor

1. Safety protection (blocking , overheating , overcurrent , voltage protection)
2. Electronic brake (the F/R switch) .
3. Battery will enter the sleep mode for saving battery in 10 s.
4. Li_battery : 6AH (60 min)
5. Charger :110-240v /2A（3hours）.

GK-03

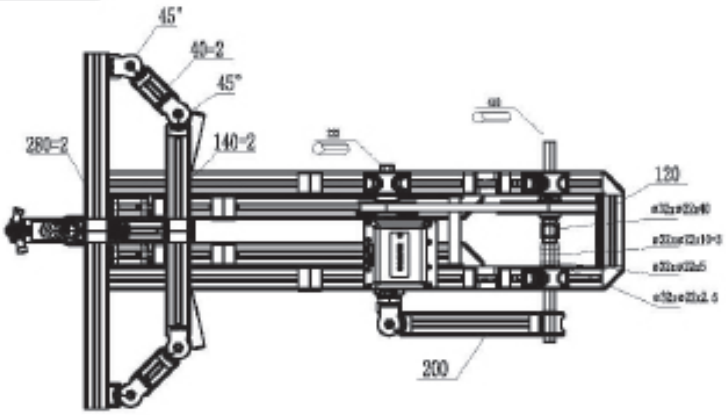


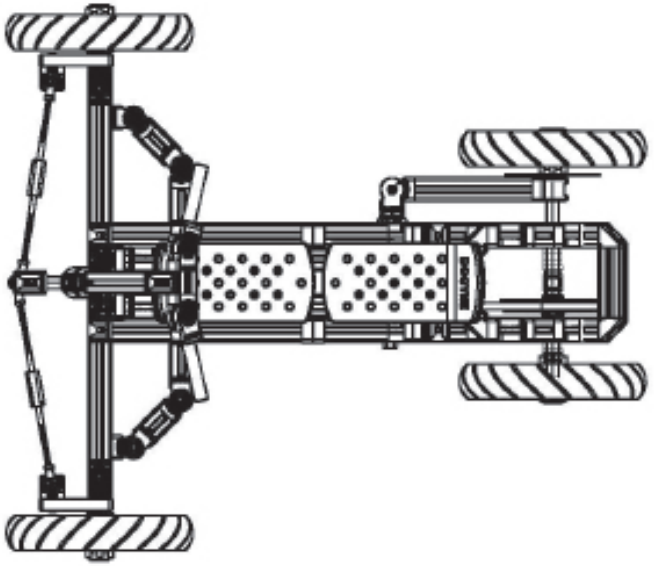

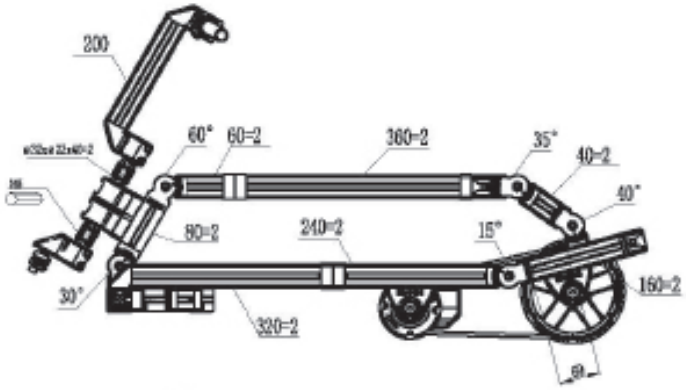


650mm/25.6IN

Weight 28kg/62LB
Load 72kg/160LB
Speed:0-10Km/h

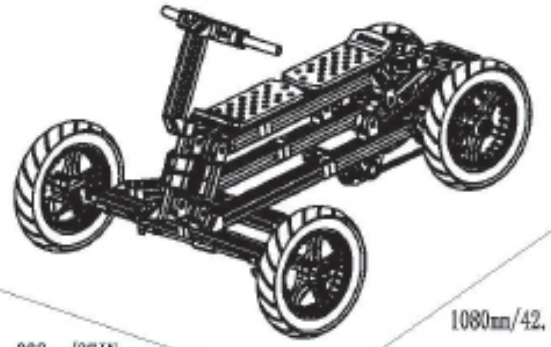

938mm/37IN

1080mm/42.5IN

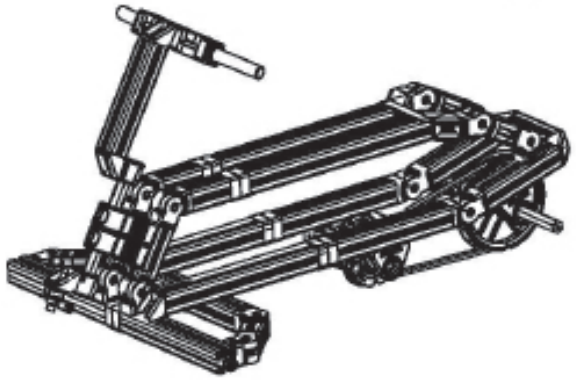

Beyond Play



www.beyondplay.me